
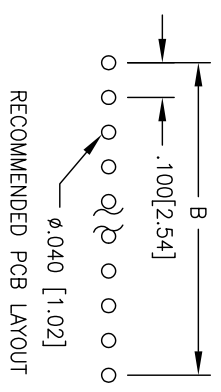

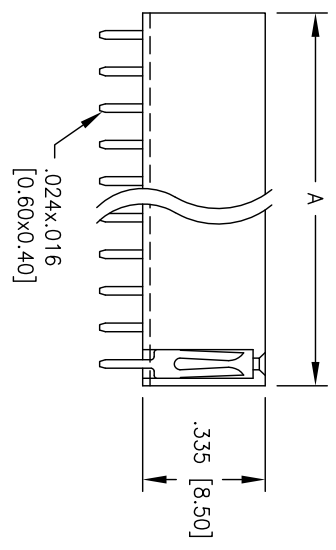


Rev	AWO #	Description	Date	Appr
-		RELEASED	11/30/10	

APPROVED: _____
 DATE: _____ TITLE: _____

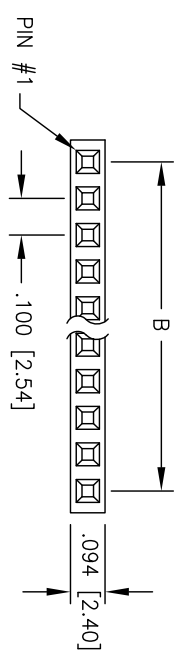

Positions: 1 thru 40
 A = .100 [2.54] X No. of Positions
 B = .100 [2.54] X No. of Spoces

SPECIFICATIONS:

- Material:** Insulator: PBT, glass reinforced, rated UL 94V-0
 Insulator color: Red
 Contacts: Phosphor Bronze
- Plating:** Gold Flash over Nickel underplate on mating area, Tin over Copper underplate on PCB tails
- Electrical:** Operating voltage: 250 VAC max
 Current rating: 3 Amps max
 Contact resistance: 20 mohms max
 Insulation resistance: 5000 Mohms min
 Dielectric withstanding voltage: 500 VAC for 1 minute
- Temperature Rating:** Operating temperature: -40C to +105C
- Environmental:** Lead free, RoHS compliant.
 Recommended soldering temp: 235 for 5 sec.



UNLESS OTHERWISE SPECIFIED	
ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
X .10	Ø X ±.10
.XX ±.020	Ø XX ±.015
.XXX ±.015	Ø XXX ±.010
APPROVALS	DATE
DRAWN AY	11/30/10
CHECKED AW	11/30/10
APPROVED	

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .100 RECEPTACLE STRIP, SINGLE ROW STRAIGHT, PCB TAILS

SIZE X	PART NO. RS1-XX-SG-RD	REV. -
REF: S00059T	SCALE: NTS	SHEET 1 OF 1