

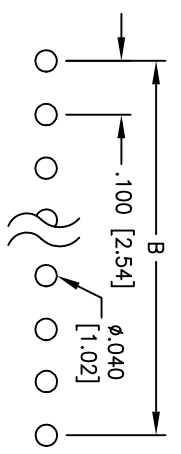
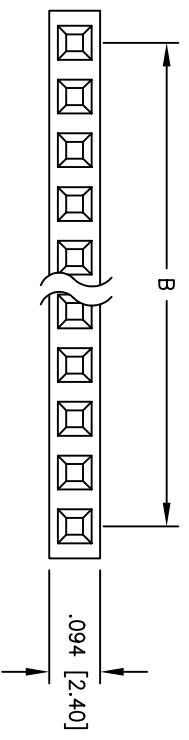


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	12/23/04	
A		ADDED ROHS TO SPECS	04/01/05	



PCB LAYOUT

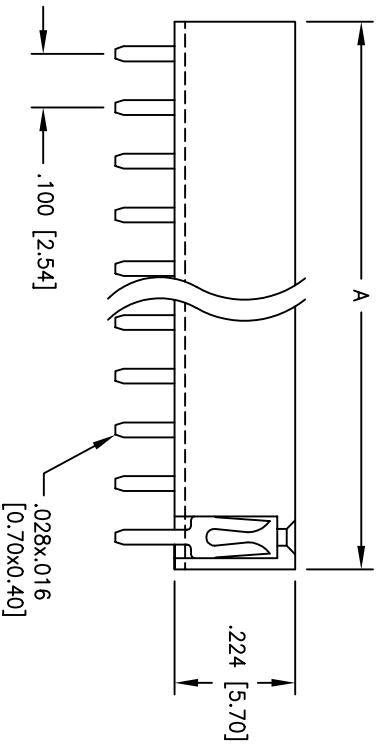

SPECIFICATIONS:

- Material: Insulator: PBT, Glass reinforced, rated UL 94V-0
- Insulator color: Black
- Contacts: Phosphor Bronze
- Plating: Tin over Copper underplate overall
- Electrical: Operating voltage: 250 VAC max. Current rating: 3 Amps max. Contact resistance: 20 mohms max. initial Insulation resistance: 5,000 Mohms min. Dielectric withstanding voltage: 1,000 VAC for 1 minute
- Temperature Rating: Operating temperature: -40°C to +105°C
- Environmental: Lead free, RoHS compliant. Recommended soldering temp: 230 for 5 sec.

A = .100 [2.54] x No. of Positions
 B = .100 [2.54] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES: X .10 ±.020 ØXX ±.015
 .XX ±.015 ØXXX ±.010
 .XXX ±.015

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

RECEPTACLE STRIP, LOW PROFILE,
 SINGLE ROW, TIN PLATED

APPROVALS		DATE		TITLE	
DRAWN	SS	10/4/04		SIZE	PART NO.
CHECKED				X	RS1L-XX-T
APPROVED				REF:	SCALE: NTS

