
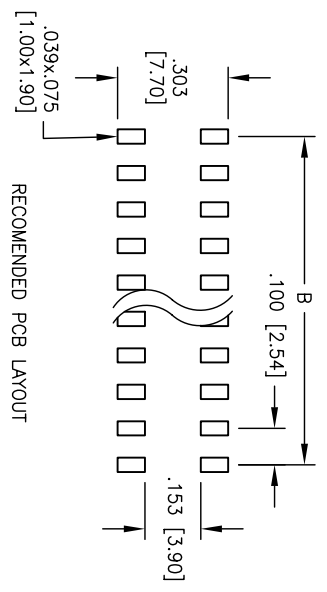

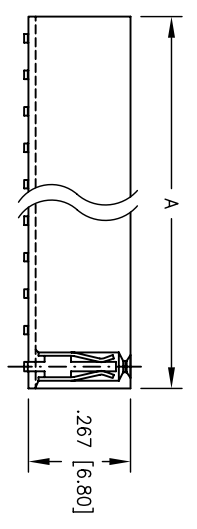


Rev	AWO #	Description	Date	Appr
-		RELEASED	9/3/104	

APPROVED: _____
 DATE: _____ TITLE: _____

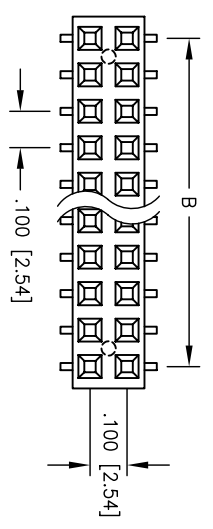

A = .100 [2.54] X No. of Positions
 B = .100 [2.54] X No. of Spaces

SPECIFICATIONS:
Material: Nylon 6T, rated UL94V-0
Contacts: Brass
Plating:
 Gold flash over nickel underplate on mating area, Tin over copper underplate on tails!

Electrical:
 Operating voltage: 250 VAC max
 Current rating: 3 Amps max
 Contact resistance: 20 mohms max
 Insulation resistance: 5000 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 500 VAC min rms
Temperature Rating:
 Operating temperature: -40°C to +105°C
 Max. Process Temp: 230°C for 30 to 60 Sec.
 260°C for 10 Sec.

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE MM [INCHES]
 TOLERANCES: EXCEPT AS NOTED
 INCHES

.X	± .10	ØXX	± .10
.XX	± .020	ØXXX	± .015
.XXX	± .015	ØXXXX	± .010

APPROVALS

DRAWN	SS	DATE
CHECKED		
APPROVED		

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE
**RECEPTACLE STRIP, DUAL ROW
 SMT MOUNT**

SIZE	PART NO.	REV.
X	RS2B-XX-SG-SMT	-
REF:	SCALE: MTS	SHEET 1 OF 1