
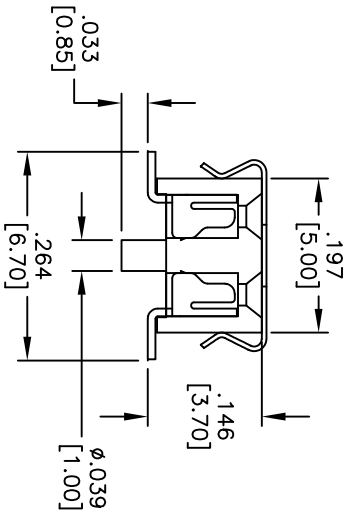
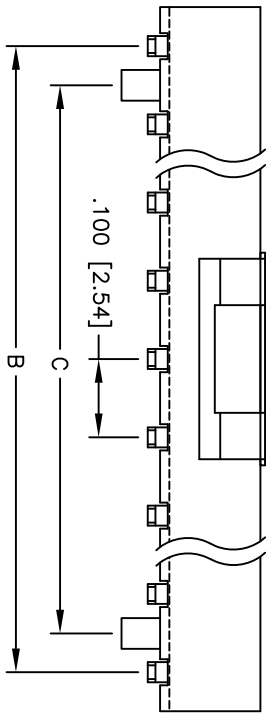
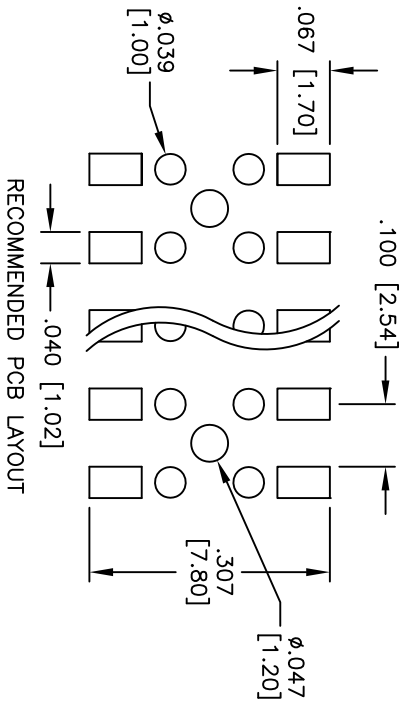


Rev	AWO #	Description	Date	Appr
-		RELEASED	9/23/10	

APPROVED: _____
 DATE: _____ TITLE: _____

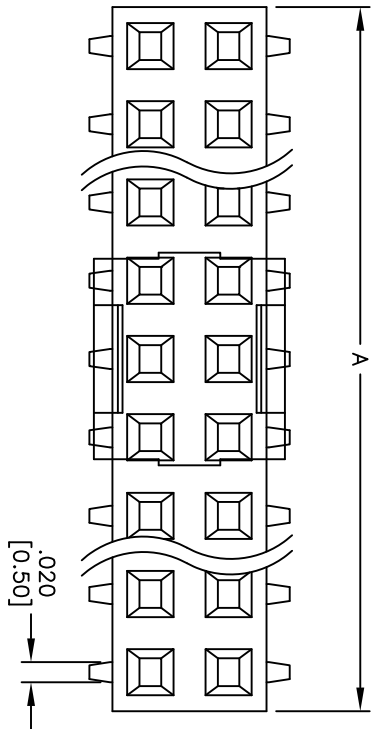


SPECIFICATIONS:

- Material: Nylon 6T, rated UL 94V-0
- Insulator color: Black
- Contacts: Phosphor Bronze
- Plating: Gold flash over Nickel underplate overall.
- Electrical:
 - Current rating: 3 Amps max.
 - Contact resistance: 20 mohms max.
 - Insulation resistance: 1,000 Mohms min.
 - Dielectric withstanding voltage: 600V AC/DC
- Temperature Rating:
 - Operating temperature: -40°C to +105°C
- Environmental:
 - Lead free, RoHS compliant
 - Recommended soldering temp: 235°C for 5 seconds

PACKAGED ON TAPE & REEL

A = .100 [2.54] x No. of Positions + .020 [0.50]
 B = .100 [2.54] x No. of Spaces
 C = .100 [2.54] x No. of Spaces - .100 [2.54]



ADAM TECH

909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .100 x .100 DUAL ROW RECEPTACLE STRIP
 .146 [3.70] HEIGHT, GOLD PLATED

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]		TOLERANCES: EXCEPT AS NOTED	
INCHES		HOLDS	
.X	± .10	ØXX	± .10
.XX	± .020	ØXXX	± .015
.XXX	± .015	ØXXXX	± .010
APPROVALS		DATE	
DRAWN	DY	9/23/10	
CHECKED			
APPROVED			
SIZE	PART NO.	REV.	
X	RS21-A-XX-G-SMT-P-PP-TR	-	
REF: S00140T	SCALE: NTS	SHEET 1 OF 1	