

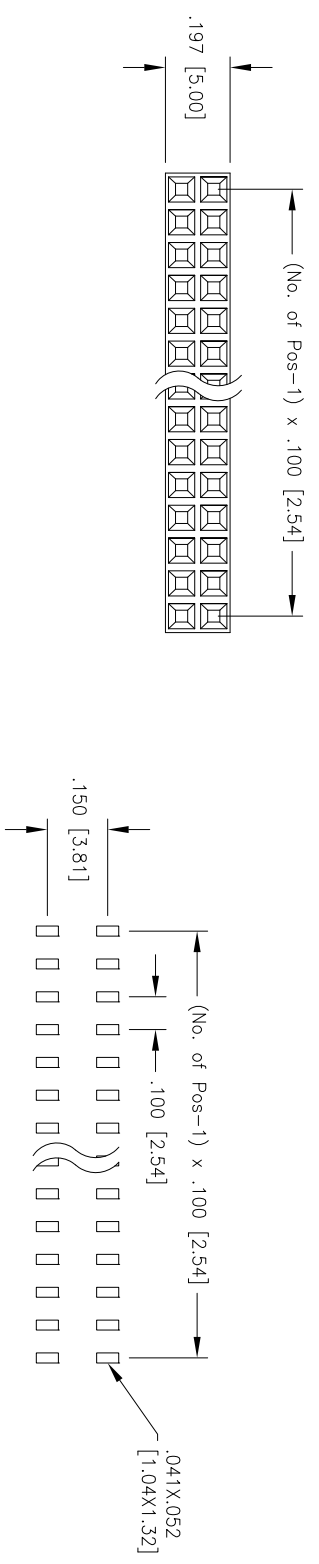


Rev	AWO #	Description	Date	Appr
-		RELEASED	12/19/07	

APPROVED: _____
 DATE: _____ TITLE: _____



**RECOMMENDED
PCB LAYOUT**

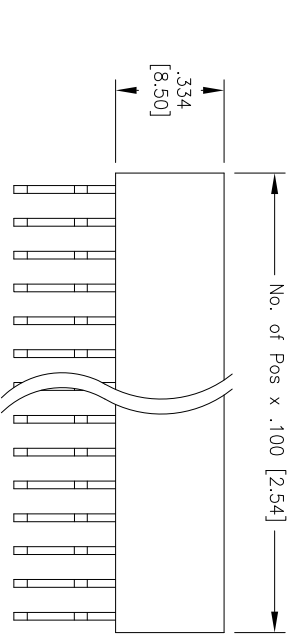

SPECIFICATIONS:

Material: Insulator: Nylon 6T, rated UL94V-0

Contacts: Brass

Plating:

Gold flash over nickel underplate on contact area,
 Tin over Copper underplate on tails.

Electrical:

Operation voltage: 250 VAC max
 Current rating: 3 Amps max

Contact resistance: 20 mohms max
 Insulation resistance: 5000 Mohms min @ 500 VDC

Dielectric withstanding voltage: 500 VAC min rms

Environmental:

Operating temperature: -40°C to +105°C
 Lead free, RoHS compliant.

Recommended soldering temp: 260°C for 5 sec.



ADAM TECH

909 Rohmway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

**RECEPTACLE STRIP, DUAL ROW, SIDE
MOUNT, SMT**

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES EXCEPT AS NOTED		TITLE	
INCHES: .10	HOLES: .10	ADAM TECH	
.X ± .10	Ø.X ± .10	RECEPTACLE STRIP, DUAL ROW, SIDE	
.XX ± .020	Ø.XX ± .015	MOUNT, SMT	
.XXX ± .015	Ø.XXX ± .010		
APPROVALS	DATE	SIZE	PART NO.
DRAWN	SS	X	RS2R-XX-SG-SMT
CHECKED		SCALE:	NTS
APPROVED		SHEET	1 OF 1