



Rev	AWO #	Description	Date	Appr
-		RELEASED	6/30/09	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

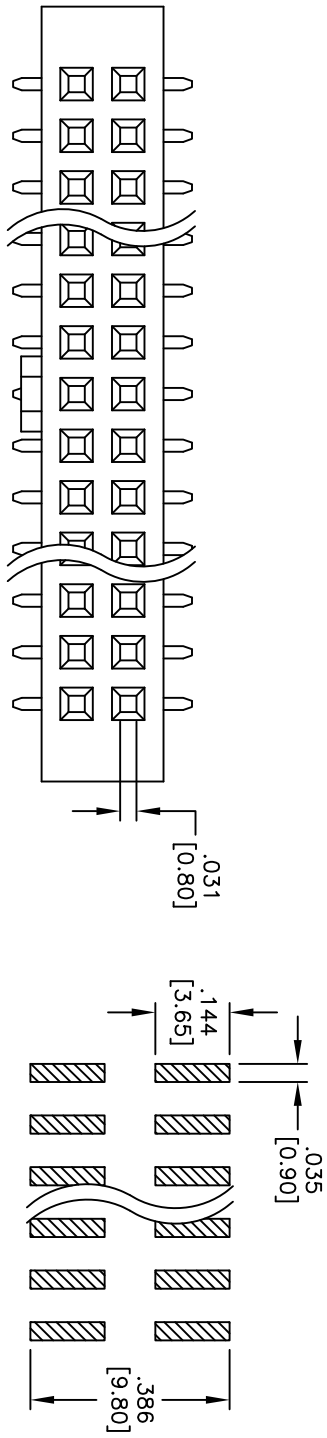

RECOMMENDED PCB LAYOUT

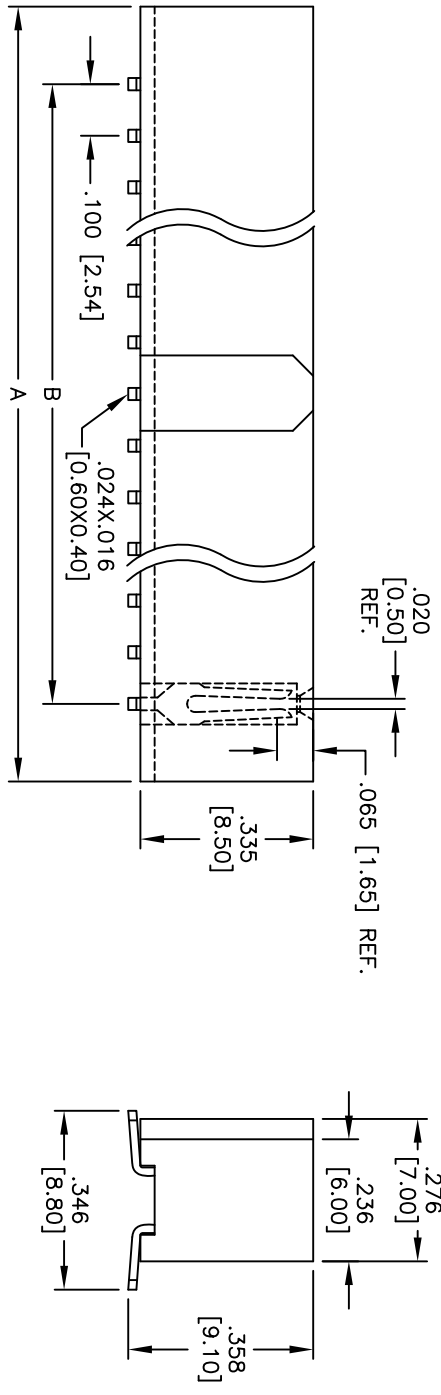

**SPECIFICATIONS:**  
 Material: Nylon 6T, rated UL 94V-0  
 Insulator color: Black  
 Contacts: Phosphor Bronze  
 Plating: Gold flash over Nickel underplate overall

**Electrical:**  
 Current rating: 3 Amps max.  
 Contact resistance: 20 mohms max. initial  
 Insulation resistance: 1,000 Mohms min.  
 Dielectric withstanding voltage: 600 VAC for 1 minute  
 Temperature Rating: Operating temperature: -40°C to +105°C  
 Environmental: Lead free, ROHS compliant  
 Recommended soldering temp: 260°C for 5 seconds

Positions: 03 thru 36  
 A = .100 [2.54] x No. of Positions per Row + .192 [4.88]  
 B = .100 [2.54] x No. of Spaces

UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE INCHES [MM]  
 TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010

APPROVALS

DRAWN	DY	6/30/09
CHECKED		
APPROVED		

**ADAM TECH**  
 909 Railway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .100 x .100 DUAL ROW RECEPTACLE STRIP  
 .335 [8.50] HEIGHT, SMT TYPE

Environmental: Lead free, ROHS compliant  
 Recommended soldering temp: 260°C for 5 seconds



SIZE	PART NO.	REV.
X	RSB-XX-G-SMT	-
REF: S00032T	SCALE: NTS	SHEET 1 OF 1