

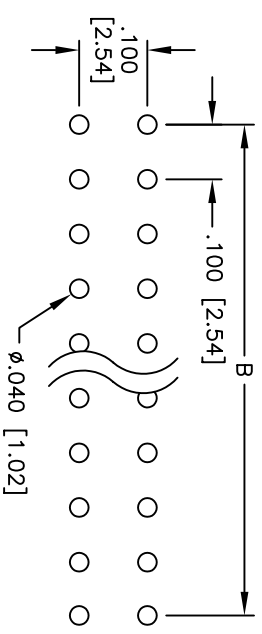
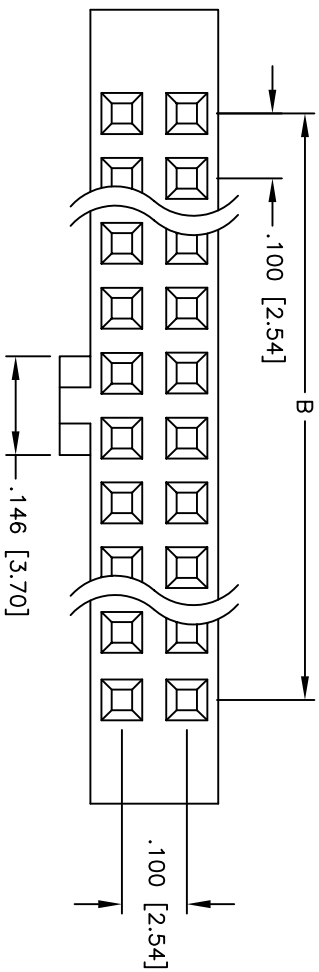


Rev	AWO #	Description	Date	Appr
-		RELEASED	6/1/05	

APPROVED: _____
 DATE: _____ TITLE: _____

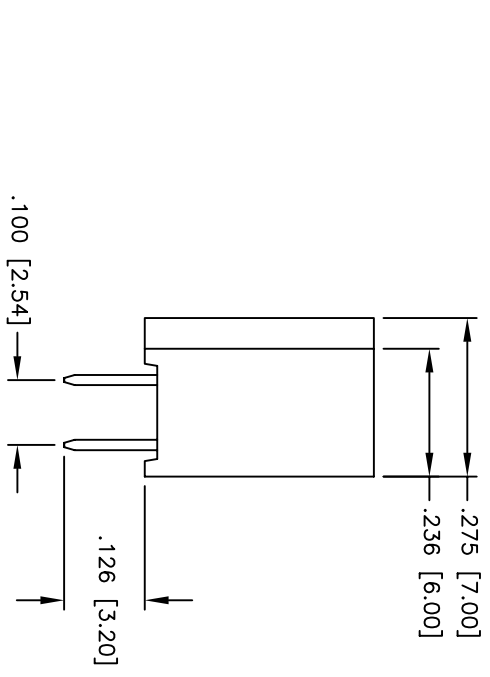

RECOMMENDED
PCB LAYOUT

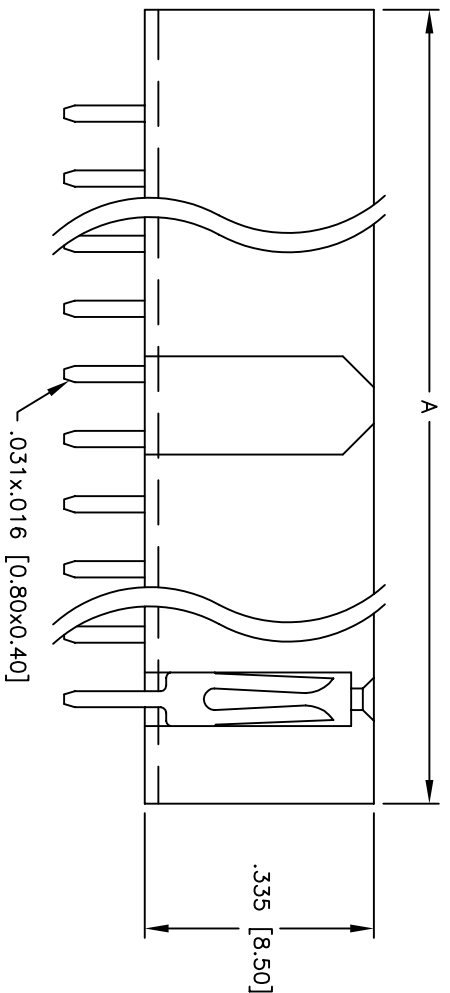

SPECIFICATIONS:

- Material: Insulator: PBT, glass reinforced, rated UL 94V-0
- Insulator color: Black
- Contacts: Phosphor Bronze
- Plating: Gold flash over Nickel underplate overall
- Electrical: Operating voltage: 250 VAC max.
- Current rating: 3 Amps max.
- Contact resistance: 20 mohms max. initial
- Insulation resistance: 5,000 Mohms min.
- Dielectric withstanding voltage: 1,000 VAC for 1 minute
- Temperature Rating: Operating temperature: -40°C to +105°C
- Environmental: Lead free, RoHS compliant
- Recommended soldering temp: 235°C for 5 seconds

Positions: 06 thru 60
 A = .100 [2.54] x No. of Positions per Row - .003 [0.08]
 B = .100 [2.54] x No. of Spaces

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]		TITLE .100 x .100 DUAL ROW RECEPTACLE STRIP	
TOLERANCES: EXCEPT AS NOTED		.335 [8.50] HEIGHT, KEVED CORNER CONTACTS	
INCHES		SIZE	
.X ± .10	ØXX ± .10	PART NO. RSB-XX-G	
.XX ± .020	ØXXX ± .015	SCALE: NTS	
.XXX ± .015	ØXXXX ± .010	SHEET 1 OF 1	
APPROVALS	DATE	REV.	
DRAWN SS	6/1/05	-	
CHECKED			
APPROVED			