
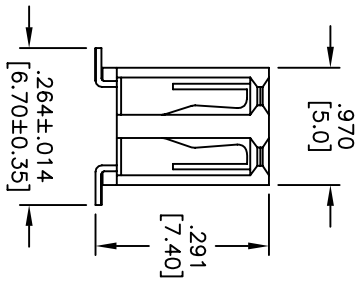
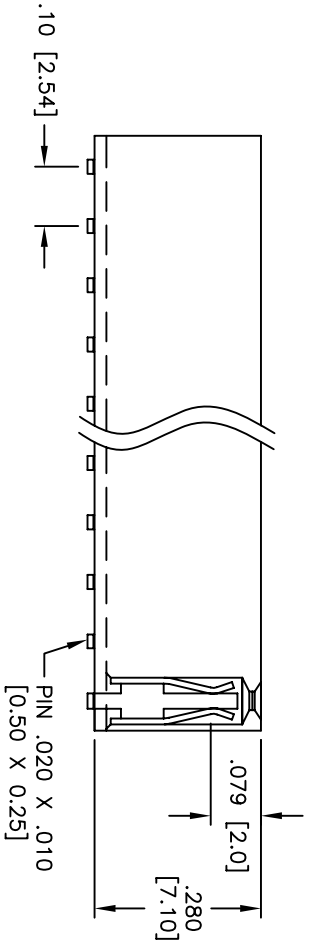
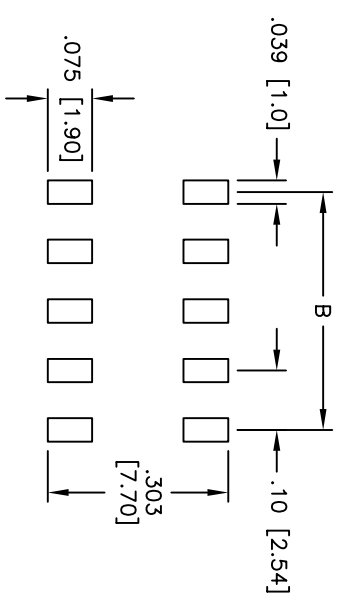


Rev	AWO #	Description	Date	Appr
-		RELEASED	12/6/07	

APPROVED: _____
 DATE: _____ TITLE: _____

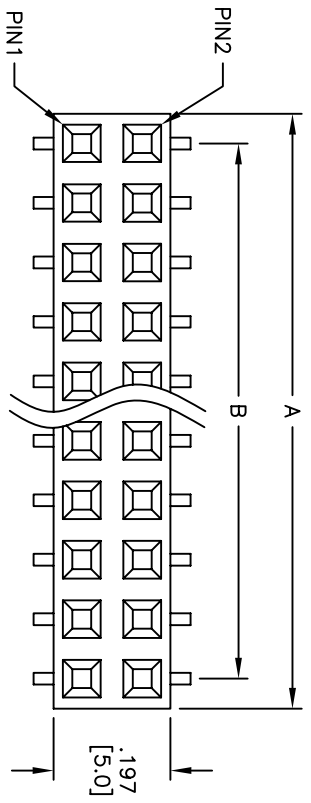

RECOMMEND PCB LAYOUT

Positions: 02 thru 80
 A=.100[2.54]X No. of Positions
 B=.100[2.54]X No. of Spaces

SPECIFICATIONS:
 Material:
 Insulator: Nylon 6T, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze
 Plating:
 Gold over Nickel underplate on contact area
 Electrical:
 Operating voltage: 250 VAC max
 Current rating: 3 Amps max
 Contact resistance: 20 mohms max
 Insulation resistance: 5000 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 1000 VAC for 1 minute
 Temperature Rating:
 Operating temperature: -40°C to +125°C
 Environmental:
 Lead free, RoHS compliant.
 Recommended soldering temp: 260°C for 5 sec.



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .100 X .100 DUAL ROW FEMALE HEADER
 SMT, GOLD

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
.X ±.10	ØXX ±.10
.XX ±.020	ØXXX ±.015
.XXX ±.015	ØXXX ±.010
APPROVALS	DATE
DRAWN	SHIREN
CHECKED	12/6/07
APPROVED	

SIZE	PART NO.	REV.
X	RSM2-XX-G-SMT	-
REF:	SCALE: NTS	SHEET 1 OF 1