
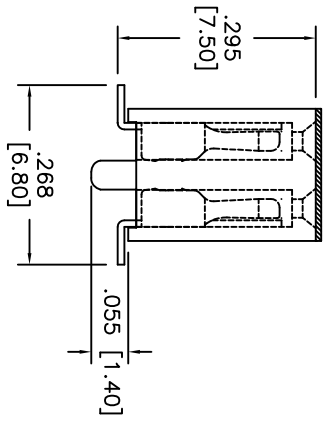
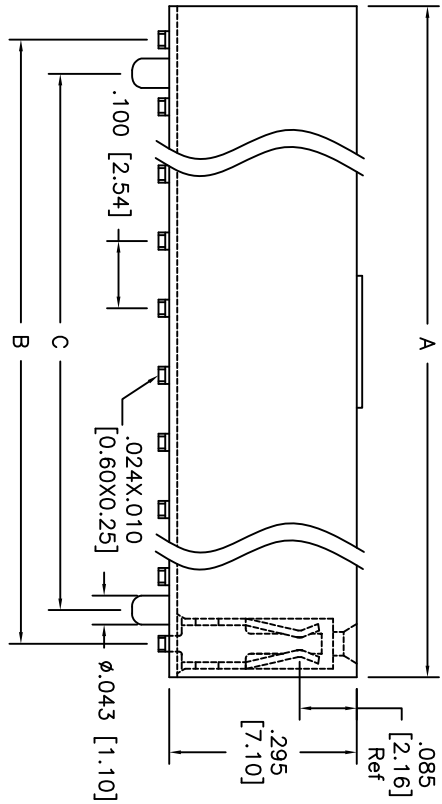
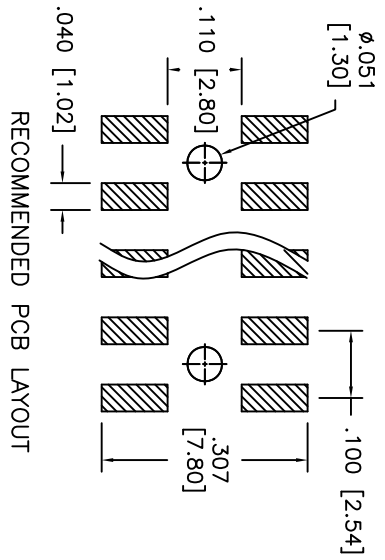


Rev	AWO #	Description	Date	Appr
-		RELEASED	12/27/10	

APPROVED: _____
 DATE: _____ TITLE: _____

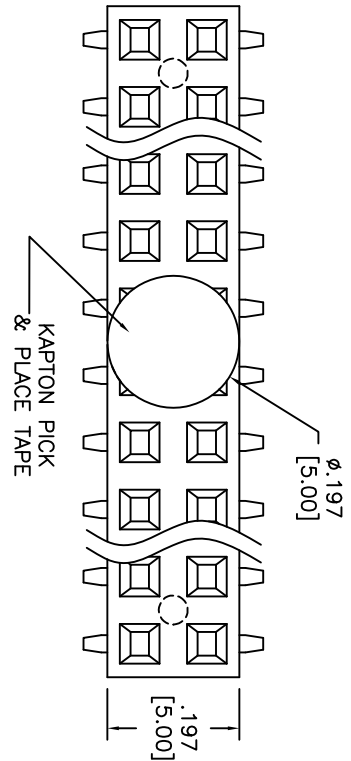

SPECIFICATIONS:
 Material: Nylon 6T, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze
 Plating:
 Gold flash over Nickel underplate on contact area,
 Tin over Copper underplate on tails.
 Electrical:
 Current rating: 3 Amps max
 Contact resistance: 20 mohms max
 Insulation resistance: 1000 Mohms min
 Dielectric withstanding voltage: 600 VAC for 1 minute
 Temperature Rating:
 Operating temperature: -40°C to +105°C
 Environmental:
 Lead free, RoHS compliant.
 Recommended soldering temp: 260°C for 5 sec.

PACKAGED ON TAPE & REEL
 A = .100 [2.54] X No. of Positions per row
 B = .100 [2.54] X No. of Spaces
 C = .100 [2.54] X No. of Positions per row - .200 [5.08]

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES HOLEES
 .X ± .10 ØXX ± .10
 .XX ± .020 ØXXX ± .015
 .XXX ± .015 ØXXX ± .010
 APPROVALS
 DRAWN AY 12/27/10
 CHECKED JL 12/27/10
 APPROVED



ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .100 X .100 DUAL ROW FEMALE HEADER
 SMT, SEL GOLD PLATED

SIZE	PART NO.	REV.
X	RSM2-XX-SG-SMT-P-KT-T/R	-
REF:	S00032T	SHEET 1 OF 1