
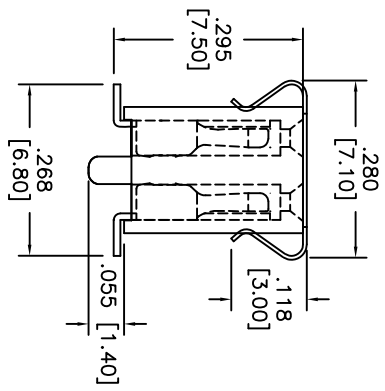
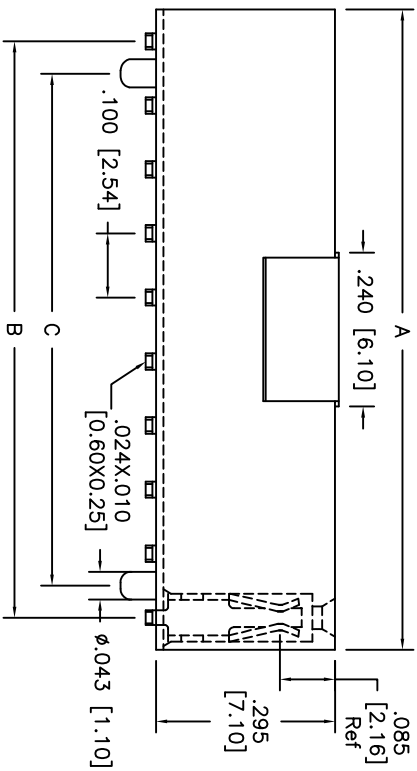
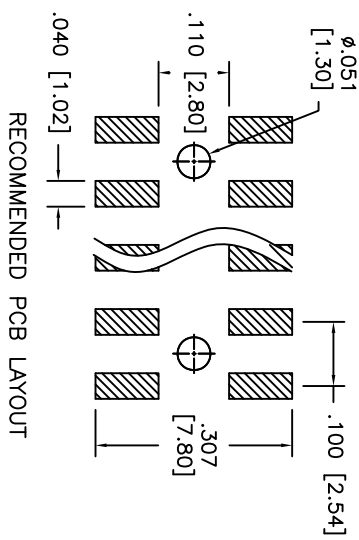


Rev	AWO #	Description	Date	Appr
-		RELEASED	1/17/11	

APPROVED: _____
 DATE: _____ TITLE: _____

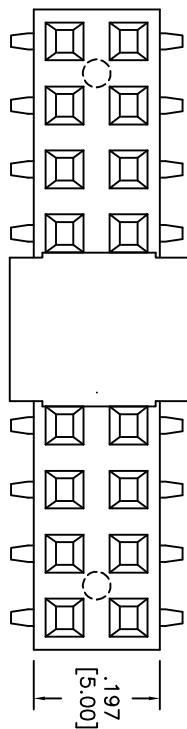

SPECIFICATIONS:

Material: Nylon 6T, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze
 Plating: 10u" Gold over Nickel underplate on contact area, Gold flash Copper underplate on tails.
 Electrical:
 Current rating: 3 Amps max
 Contact resistance: 20 mohms max
 Insulation resistance: 1000 Mohms min
 Dielectric withstanding voltage: 600 VAC for 1 minute
 Temperature Rating: Operating temperature: -40°C to +105°C
 Environmental:
 Lead free, RoHS compliant.
 Recommended soldering temp: 260°C for 5 sec.

PACKAGED ON TAPE & REEL

A = .100 [2.54] X No. of Positions per row
 B = .100 [2.54] X No. of Spaces
 C = .100 [2.54] X No. of Positions per row - .200 [5.08]

ADAM TECH

909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .100 X .100 DUAL ROW FEMALE HEADER
 SMT, 10u"SEL GOLD PLATED



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010
APPROVALS	DATE
DRAWN AY	1/17/11
CHECKED JL	1/17/11
APPROVED	

SIZE	PART NO.	REV.
X	RSM2-XX-SG-SMT-P-PP-10-T/R	-
REF:	S00032T	
SCALE:	NIS	SHEET 1 OF 1