

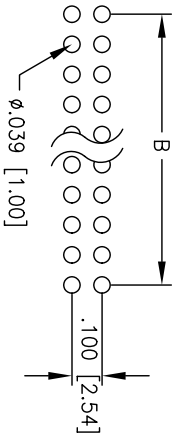


Rev	AWO #	Description	Date	Appr
-		RELEASED	04/01/05	

APPROVED: _____ TITLE: _____
 DATE: _____

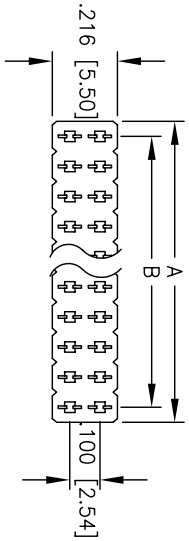

RECOMMENDED PCB LAYOUT

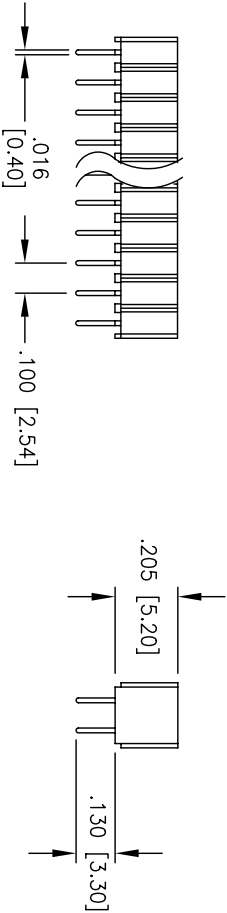

A = .100 [2.54] X No. of Positions Per Row
 B = .100 [2.54] X No. of Spaces

SPECIFICATIONS:

- Material: Insulator: PBT, Glass reinforced, rated UL 94V-0
- Insulator color: Black
- Contacts: Phosphor Bronze
- Plating: Tin over Copper underplate overall
- Electrical:
 - Operating voltage: 250 VAC max.
 - Current rating: 3 Amps max.
 - Contact resistance: 20 mohms max. initial
 - Insulation resistance: 5,000 Mohms min.
 - Dielectric withstanding voltage: 1,000 VAC for 1 minute
- Temperature Rating:
 - Operating temperature: -40°C to +105°C
- Environmental:
 - Lead free, RoHS compliant.
 - Recommended soldering temp: 230 for 5 sec.



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

RECEPTACLE STRIP, VERY LOW PROFILE,
 DUAL ROW, TIN PLATED

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		INCHES		HOLE SIZES	
X	± .10	ØXX	± .10	ØXX	± .015
.XX	± .020	ØXXX	± .015	ØXXX	± .010
.XXX	± .015	ØXXXX	± .010	ØXXXX	± .010
APPROVALS		DATE		TITLE	
DRAWN	SS	04/01/05		RECEPTACLE STRIP, VERY LOW PROFILE, DUAL ROW, TIN PLATED	
CHECKED				SIZE	PART NO.
APPROVED				X	RSVL-2B-XX-T
REV.		SCALE: NTS		SHEET 1 OF 1	