

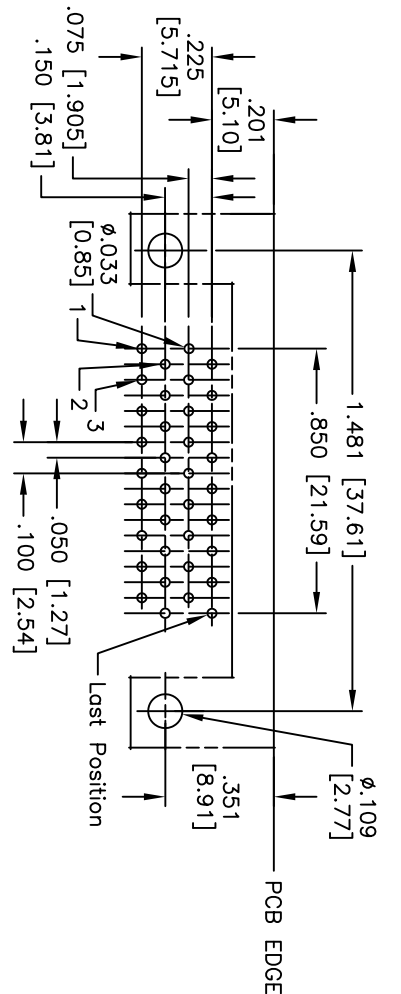
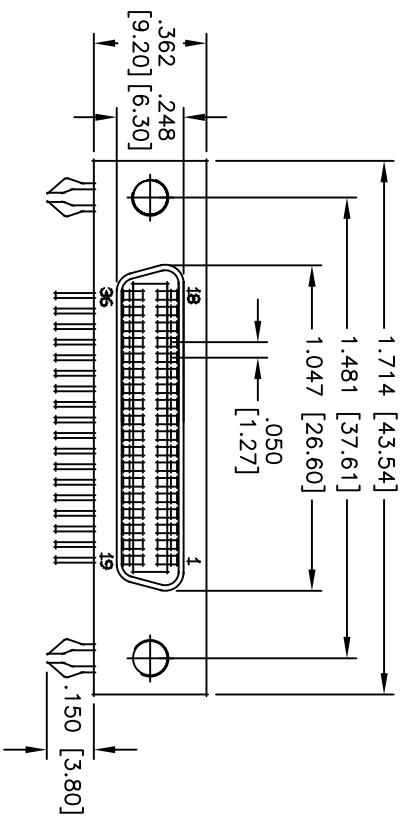


Rev	AWO #	Description	Date	Appr
-		RELEASED	12/09/10	

APPROVED: _____
 DATE: _____ TITLE: _____

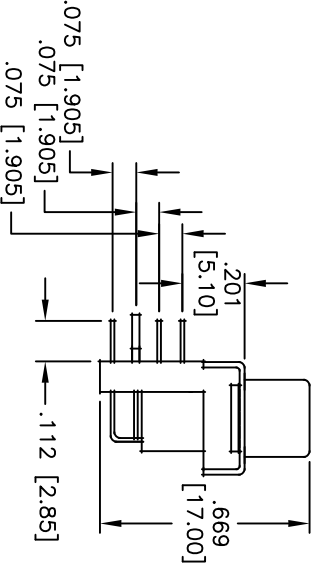

RECOMMENDED PCB LAYOUT

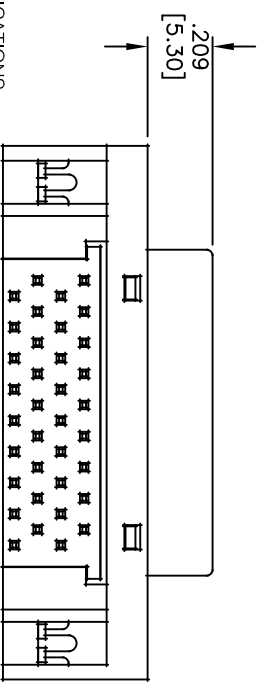

SPECIFICATIONS:

- Material: PBT, glass reinforced, rated UL 94V-0
- Insulator color: Black
- Contacts: Phosphor Bronze
- Front Shell: Steel, Nickel plated
- Bracket: Steel, Nickel plated
- Boardlock: Brass, Tin plated
- Plating: Gold flash over Nickel underplate on mating area, Tin over Copper underplate on tails
- Electrical: Current rating: 1 Amp max
 Contact resistance: 35 mohms max
 Insulation resistance: 500 Mohms min
 Dielectric withstanding voltage: 500 VAC for 1 minute
 Temperature Rating: Operating temperature: -55°C to +105°C
- Environmental: Lead free, RoHS compliant
- Recommended soldering temp: 235°C for 5 seconds

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

SCSI II/III SOCKET, R/A, NO LATCH BLOCKS
 BOARDLOCKS, M.2.6 MOUNTING HOLES

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES [MM]		TOLERANCES: EXCEPT AS NOTED	
INCHES		HOLE	
.X	± .10	ØX	± .10
.XX	± .020	ØXXX	± .015
.XXX	± .015	ØXXXX	± .010
APPROVALS	DATE	DATE	DATE
DRAWN	DY	12/09/10	
CHECKED			
APPROVED			
TITLE		SIZE	PART NO.
SCSI II/III SOCKET, R/A, NO LATCH BLOCKS		X	S2A-SR-36-2-BL-3-A
BOARDLOCKS, M.2.6 MOUNTING HOLES		REF: S00705T	SCALE: NTS
		SHEET 1 OF 1	REV.