
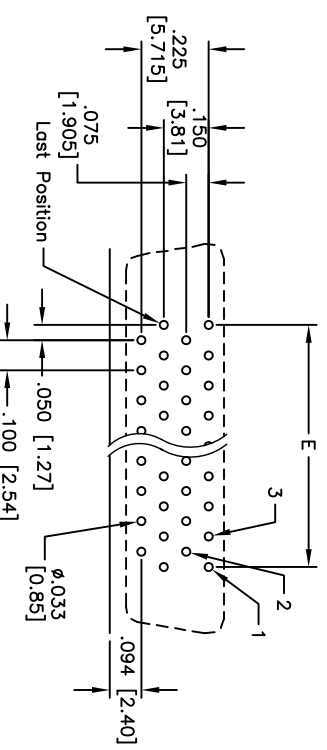
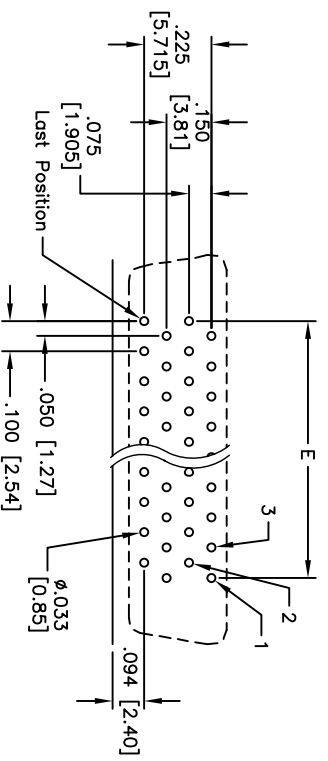
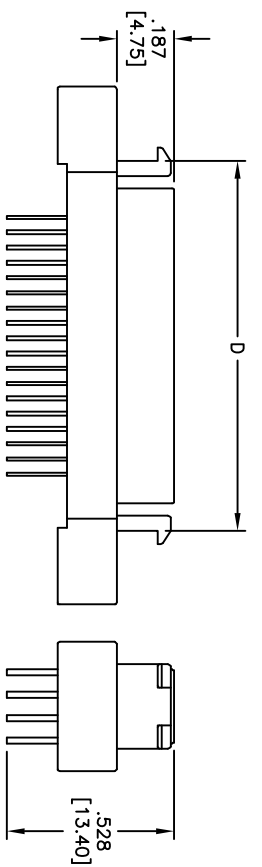


Rev	AWO #	Description	Date	Appr
-	9693	RELEASED	8/11/09	

APPROVED: _____
 DATE: _____ TITLE: _____

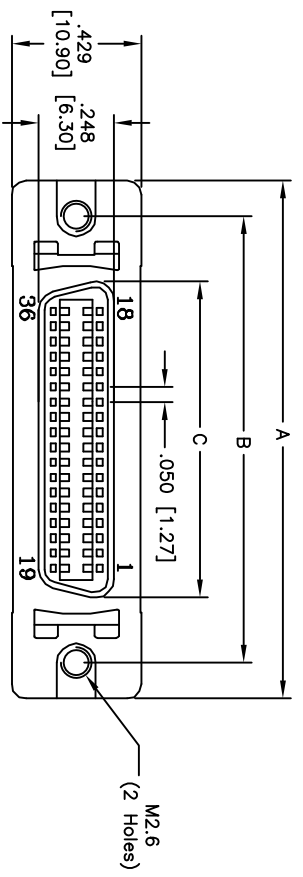

Positions	A	B	C	D	E
26	1.465	37.20	1.228	31.20	.797
36	1.713	43.50	1.480	37.60	1.047
50	2.071	52.60	1.843	46.80	1.394
68	2.520	64.00	2.280	57.90	1.846

SPECIFICATIONS:

- Material: Insulator: PBT, rated UL 94V-0
- Insulator color: Black
- Contacts: Copper Alloy
- Bracket: Die-cast Zinc, Nickel plated
- Plating: Gold flash over Nickel underplate on contact area, Tin over copper underplate on tails.

Electrical:

- Current rating: 1 Amps max
- Contact resistance: 35 mohms max
- Insulation resistance: 500 Mohms min
- Dielectric withstanding voltage: 500 VAC for 1 minute
- Temperature Rating: Operating temperature: -55°C to +105°C
- Environmental: Lead free, RoHS compliant
- Recommended soldering temp: 235°C for 5 seconds



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .050 [1.27] RIBBON CONNECTOR SOCKET, VERTICAL
 W/ LATCH BLOCKS, M2.6 THREADED HOLES

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010
APPROVALS	DATE
DRAWN	DY
CHECKED	
APPROVED	

REF: S0087T	SCALE: NTS	SHEET 2 OF 2
-------------	------------	--------------