Rev	AWO #	Description	Date	Appr
-	4439	RELEASED	10/12/06	

APPROVED: _____

DATE: _____ TITLE: _____

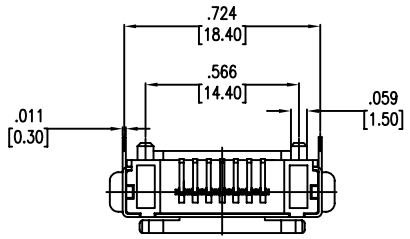

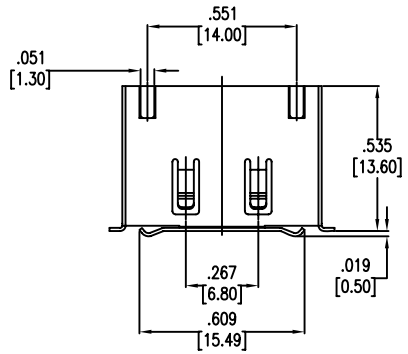

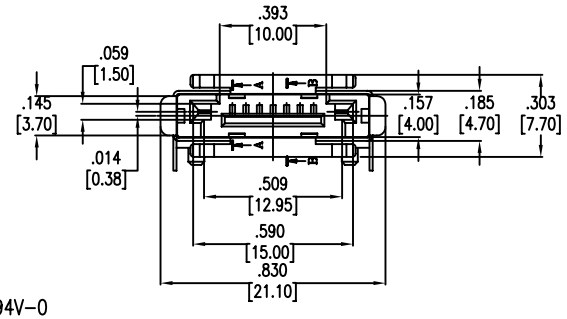







SECT A–A



SECT B–B

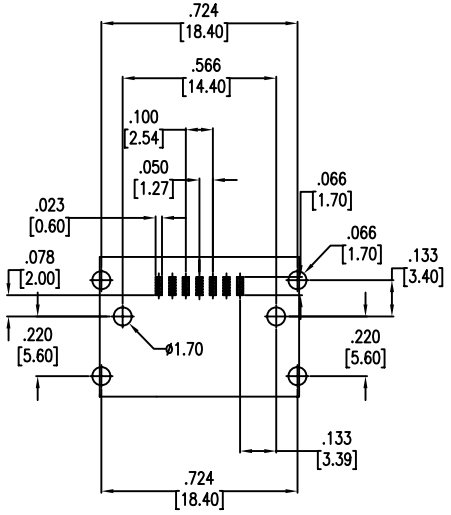

P.C.B Layout

SPECIFICATIONS:
Material:
Insulator: LCP, rated UL 94V–0
Insulator color: Black
Contacts: Brass
Plating:
Gold Flash over Nickel underplate on contact area,
Tin over Copper underplate on solder tails
Electrical:
Operating voltage: 100 VAC max
Current rating: 1.5 Amps max
Contact resistance: 30 mohms max
Insulation resistance: 1000 Mohms min @ 500 VDC
Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating:
Operating temperature: –55°C TO +125°C

Environmental:
Lead free, RoHS compliant.
Recommended soldering temp: 260 for 5 sec.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	BW	12/12/06
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: SATA CONNECTOR, VERTICAL, RIGHT SURFACE MOUNT

SIZE	PART NO.	REV.
X	SATA-J-NP-SMT-P-S-PG	-

REF: | SCALE: NTS | SHEET 1 OF 1