APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	3/31/09	
A		REVISED DIM.	9/03/09	

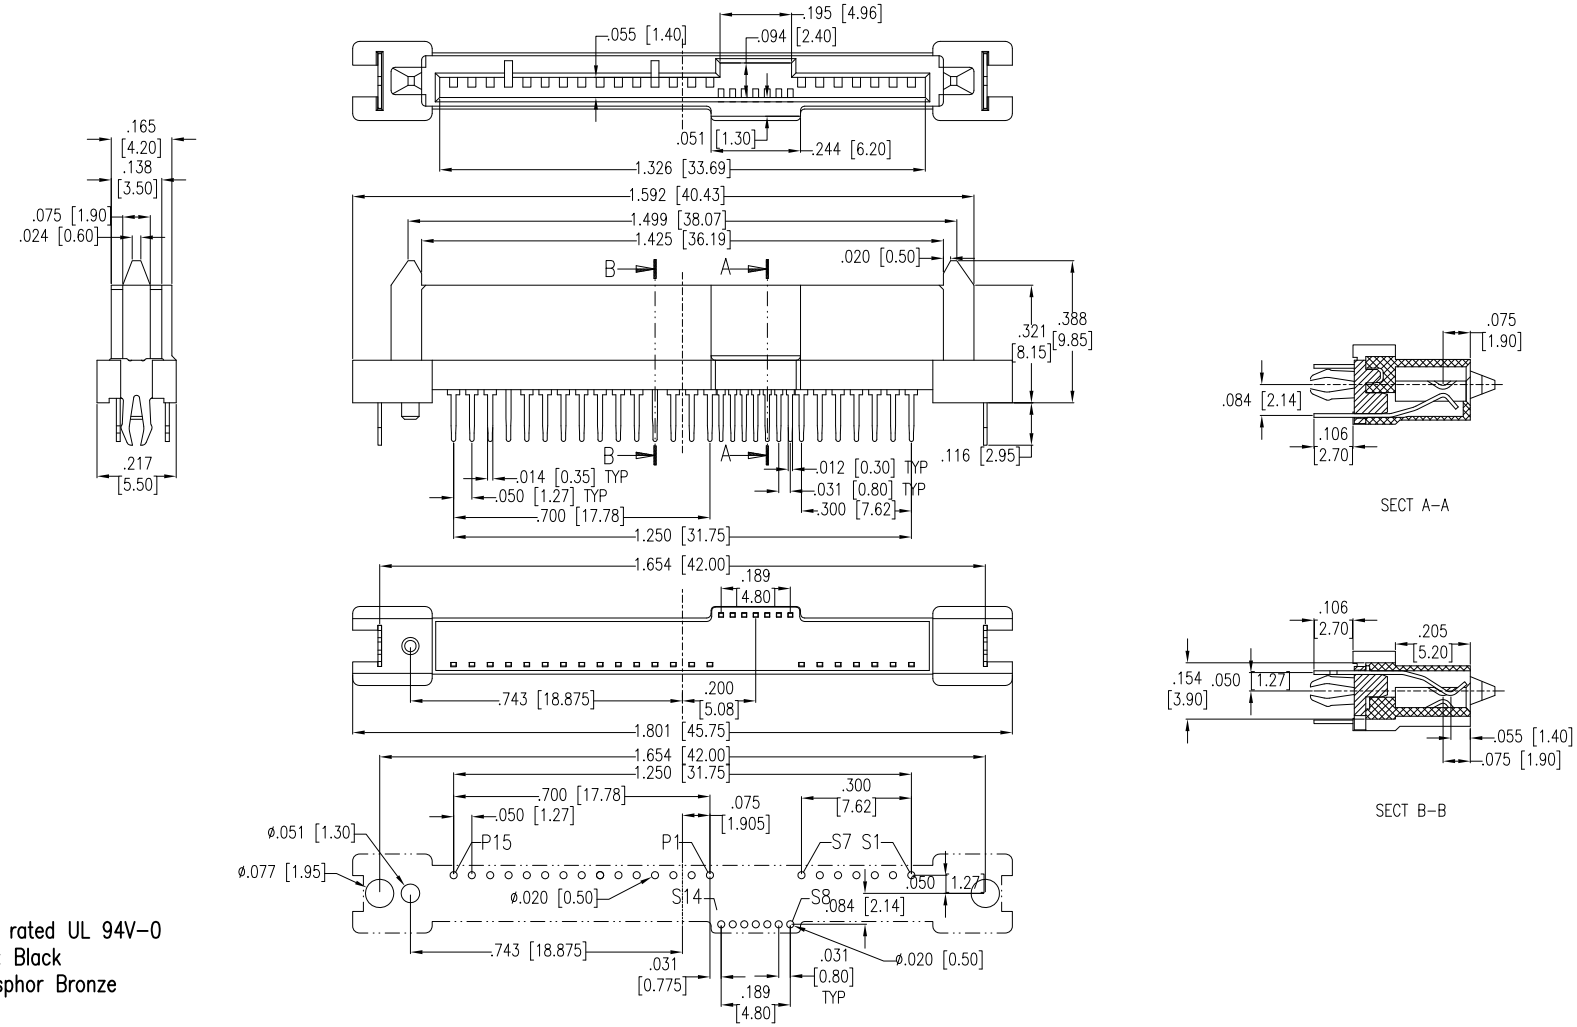

SECT A–A

SECT B–B

SPECIFICATIONS:
Material:
Insulator: LCP, rated UL 94V-0
Insulator color: Black
Contacts: Phosphor Bronze
Plating:
Gold Flash over Nickel underplate on contact area,
Tin over Copper underplate on solder tails
Electrical:
Current rating: 1 Amps max
Contact resistance: 30 mohms max
Insulation resistance: 1000 Mohms min
Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating:
Operating temperature: 0° C to +55° C
Environmental:
Lead free, RoHS compliant
Recommended soldering temp: 260° C for 5 seconds

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	DY	3/31/09
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: SATA CONNECTOR, FEMALE, 7+15+7PIN, STRAIGHT, THRU-HOLE

SIZE	PART NO.	REV.
X	SATA-R-PM-VT	A

REF: S00078T | SCALE: NTS | SHEET 1 OF 1