
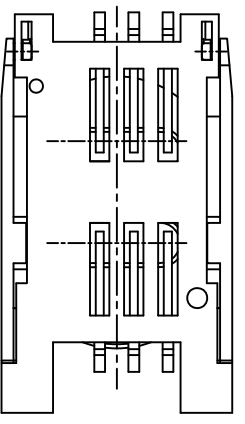
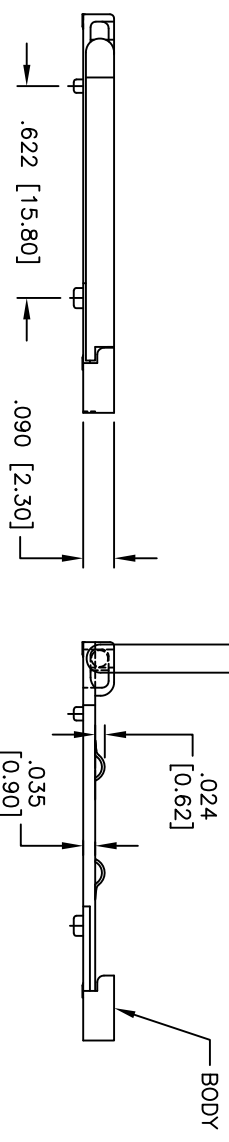


Rev	AWO #	Description	Date	Appr
-		RELEASED	3/30/10	

APPROVED: _____
 DATE: _____ TITLE: _____

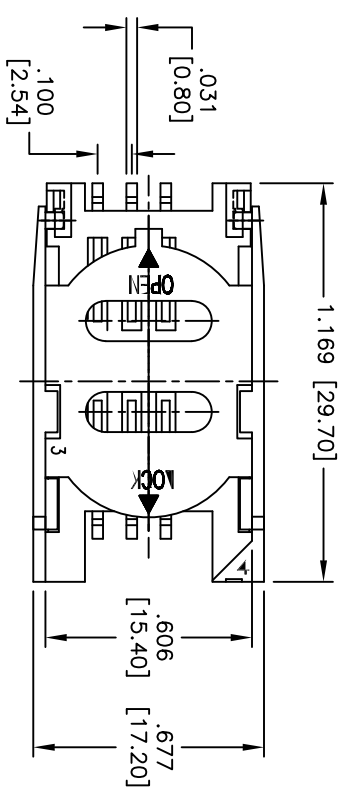

PACKAGED ON TAPE & REEL

RECOMMENDED P.C.B. LAYOUT
 TOP VIEW

RECOMMENDED P.C.B. LAYOUT
 TOP VIEW

SPECIFICATIONS:
 Material:
 Insulator: PPS, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze
 Plating:
 Gold flash over Nickel underplate on contact area, tin over copper underplate on tails.
 Electrical:
 Operating voltage: 250 VAC max
 Current rating: 0.5 Amp max
 Contact resistance: 30 mohms max
 Insulation resistance: 1,000 Mohms min
 Dielectric withstanding voltage: 500 VAC for 1 minute
 Temperature Rating:
 Operating temperature: -25°C to +85°C
 Environmental:
 Lead free, RoHS compliant
 Recommended soldering temp: 260°C for 5 seconds



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: SIM CARD 6 PIN, WITH POST
 W / HINGED COVER, NO SWITCH

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	HOLDS
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN DY	3/30/10
CHECKED	
APPROVED	

SIZE X	PART NO. SCC-06-SG-HC-NS-T/R	REV. -
REF: S0009T	SCALE: NTS	SHEET 1 OF 1

6 5 4 3 2 1