
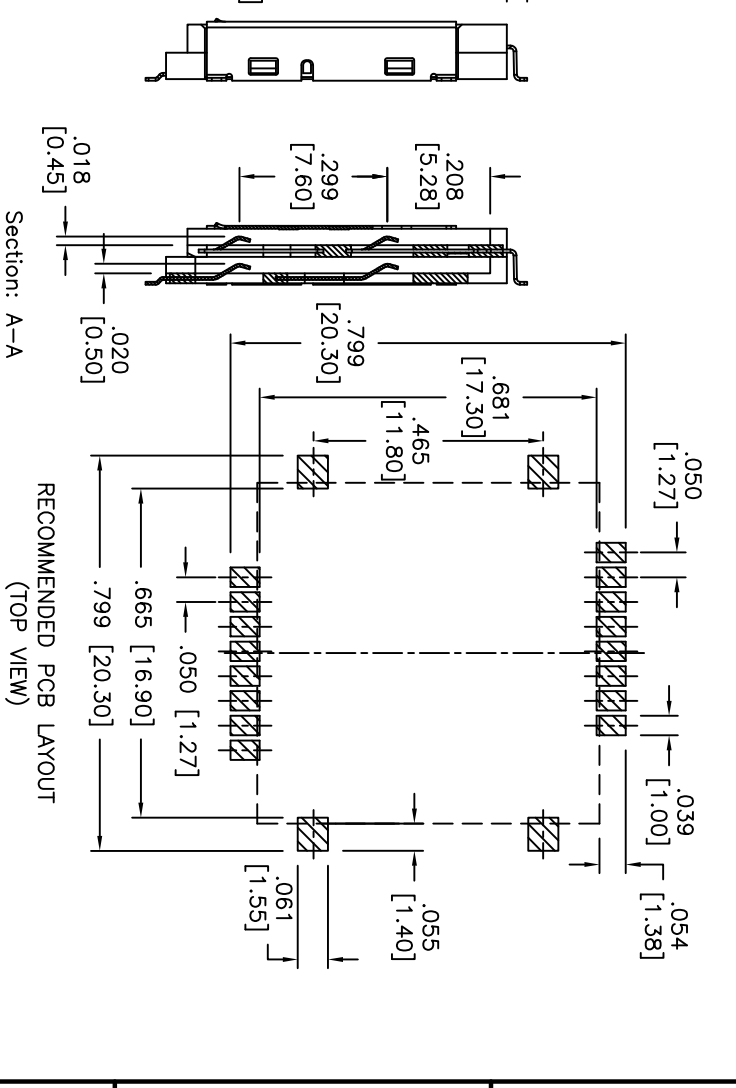


6	5	4	3	2	1		
APPROVED: _____	TITLE: _____	DATE: _____	Rev	AWO #	Description	Date	Appr
			-		RELEASED	9/16/10	

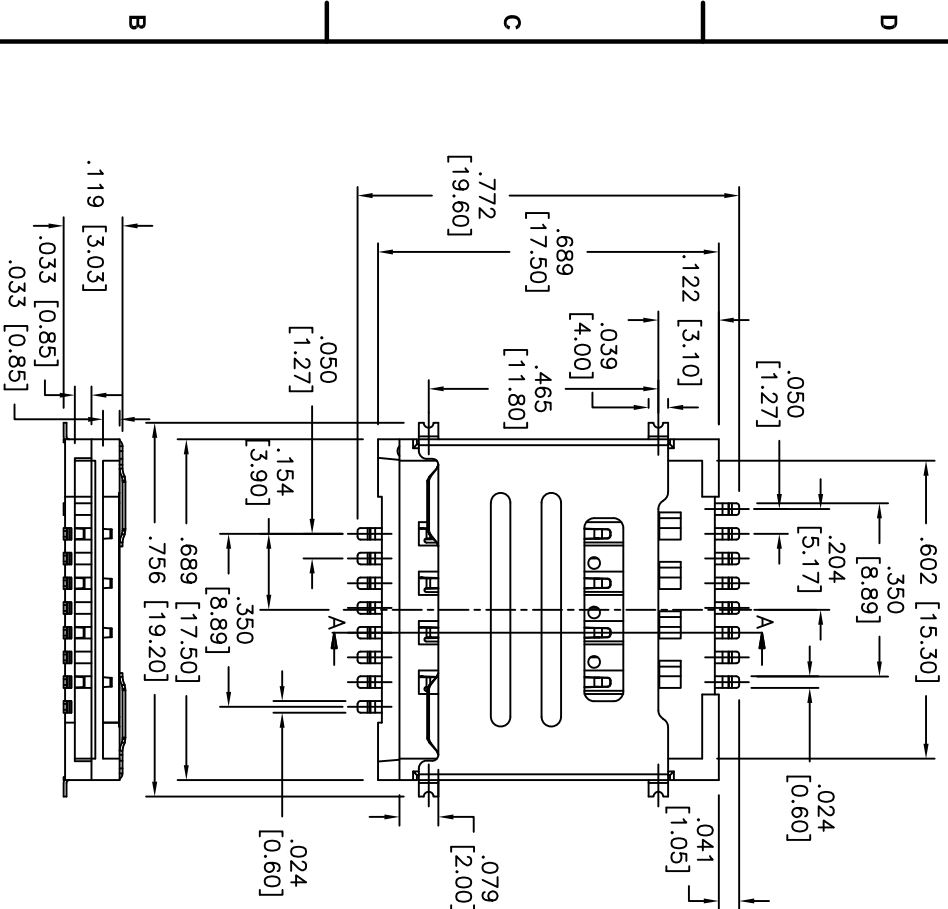

SPECIFICATIONS:

Material:
 Insulator: Hi-temp thermoplastic, rated UL 94V-0
 Insulator color: Black
 Contacts: Copper Alloy, Gold over Nickel plated
 Shell: Stainless steel

Electrical:
 Rated current: 1A max.
 Contact resistance: 50 mohms max.
 Insulation resistance: 1000 Mohms min @ 500VDC
 Dielectric withstanding voltage: 500VAC rms 1 min.

Temperature Rating:
 Operating temperature: -40°C to +85°C

Environmental:
 Lead free, RoHS compliant.
 Recommended soldering temp: 260°C for 5 sec.

Environmental:
 Lead free, RoHS compliant.
 Recommended soldering temp: 260°C for 5 sec.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED	
INCHES	[MM]
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010
APPROVALS	
DRAWN	DY 9/16/10
CHECKED	
APPROVED	

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: SIM CARD CONNECTOR, 8 POSITION SURFACE MOUNT

SIZE: X PART NO.: SCC-J-08-SMT-A
 REF: S0010T SCALE: NTS SHEET 1 OF 1