


Rev	AWO #	Description	Date	Appr
-		RELEASED	3/08/10	

APPROVED: _____
 DATE: _____ TITLE: _____

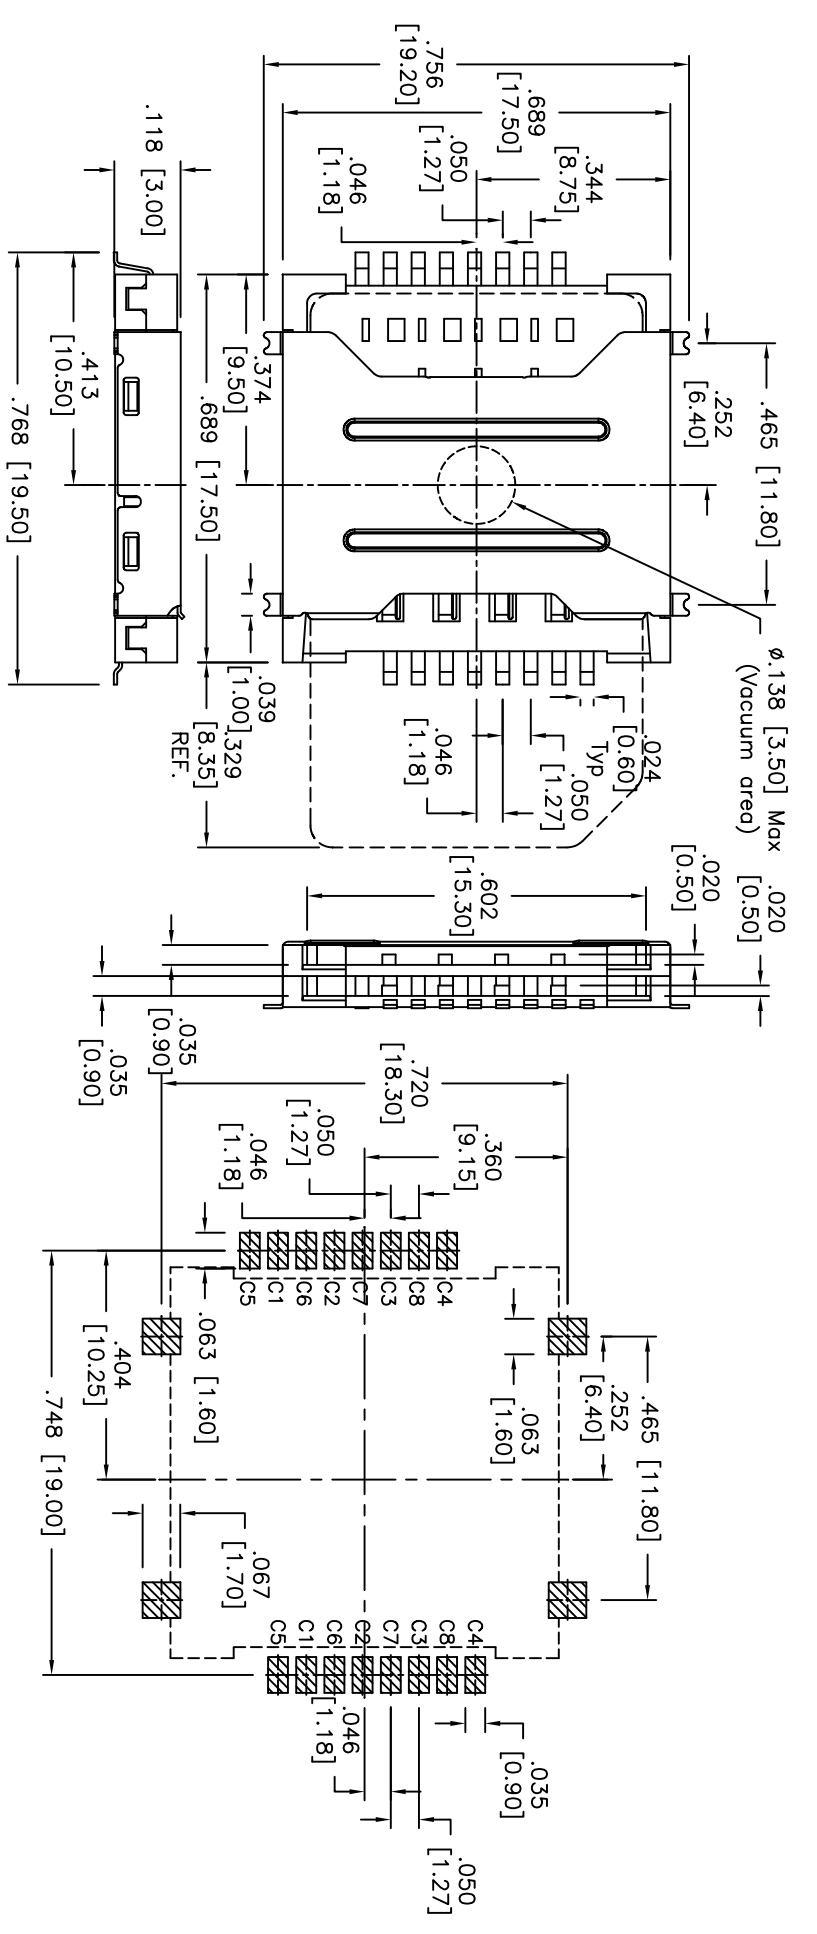

RECOMMENDED PCB LAYOUT

SPECIFICATIONS:

- Material:** Insulator: Hi-temp thermoplastic, rated UL 94V-0
- Insulator color: Black
- Contacts: Phosphor Bronze
- Plating:** Gold flash over Nickel underplate on contact area, Tin over Copper underplate on SMT tails.
- Electrical:** Contact resistance: 100 mohms max. Insulation resistance: 1000 Mohms min
- Temperature Rating:** Operating temperature: -40°C to +85°C
- Environmental:** Lead free, RoHS compliant.
- Recommended soldering temp: 260°C for 5 sec.

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010
APPROVALS	
DRAWN	DY
CHECKED	
APPROVED	
	3/08/10

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: SIM CARD CONNECTOR, 8 POSITION SURFACE MOUNT

SIZE: X PART NO.: SCC-J-08-SMT

REF: S0009T SCALE: NTS SHEET 1 OF 1