
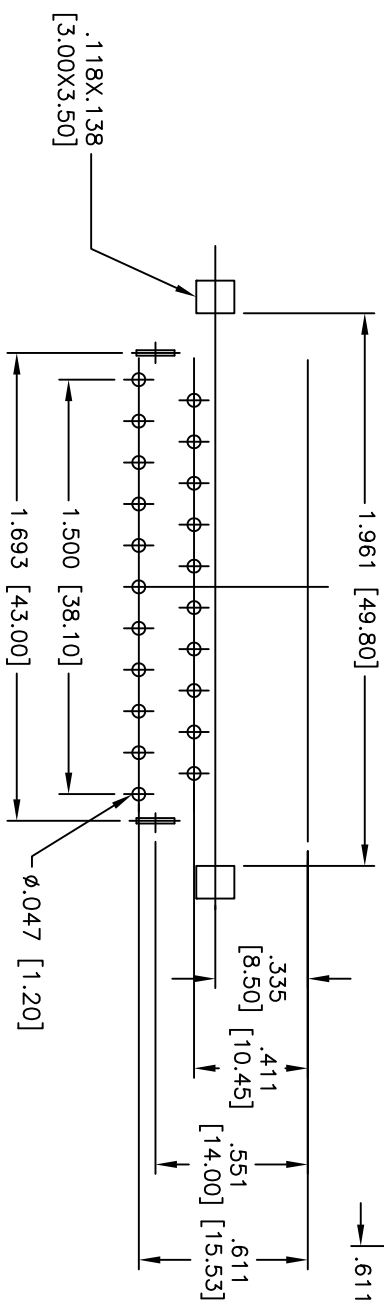
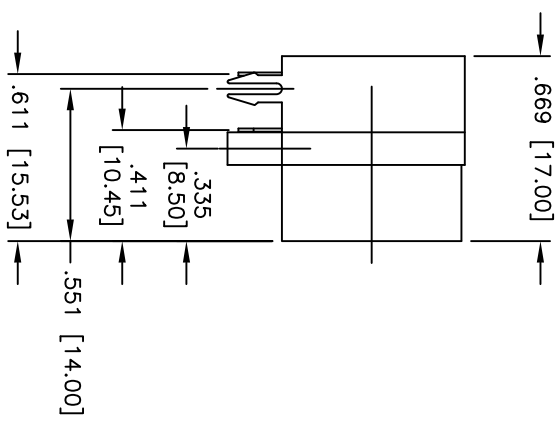


Rev	AWO #	Description	Date	Appr
-		RELEASED	9/17/10	

APPROVED: _____
 DATE: _____ TITLE: _____

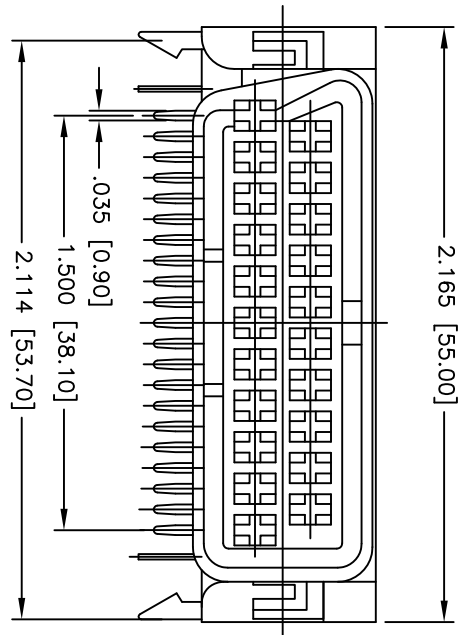

SPECIFICATIONS:

- Material: PC, rated UL 94V-2 & Glass fiber
- Insulator color: Black
- Contacts: Brass
- Plating: Tin over Copper underplate overall
- Electrical:
 - Operating voltage: 250 VAC max
 - Current rating: 3 Amps max
 - Contact resistance: 5,000 Mohms max
 - Insulation resistance: 5,000 Mohms min @ 100 VDC
 - Dielectric withstanding voltage: 350 VAC for 1 minute
- Environmental: Lead free, RoHS Compliant
- Recommended soldering temp: 235° for 5 seconds



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

SCART CONNECTOR, 21 PIN, RIGHT ANGLE

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	
DRAWN	AY 9/17/10
CHECKED	AH 9/17/10
APPROVED	

TITLE		PART NO.		REV.
SCART CONNECTOR, 21 PIN, RIGHT ANGLE		SCT-SR-21-A-S1		-
SIZE	REF:	SCALE:	SHEET	OF
X	S00167T	NTS	1	1