

6

5

4





3

2

1

APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	1/28/05	
A		REDRAWN	12/14/09	

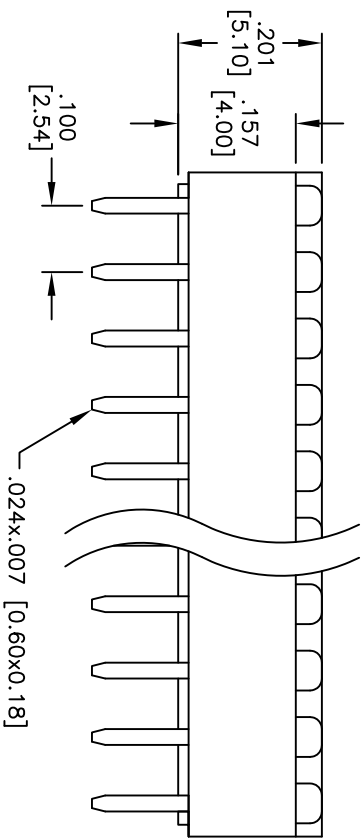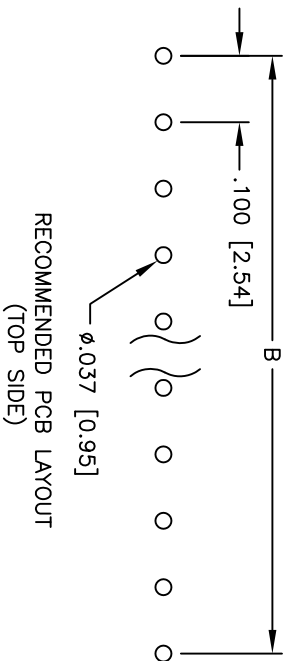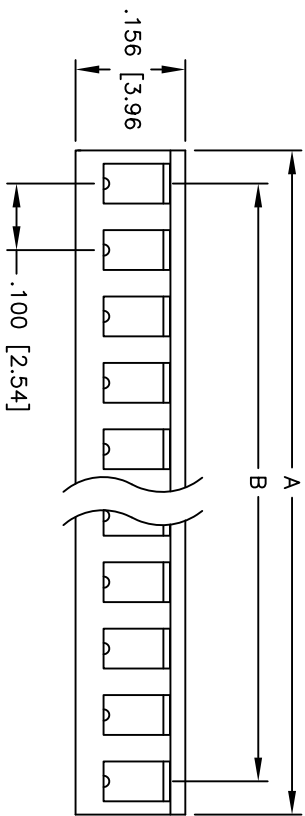

SPECIFICATIONS:

Material:

Insulator: PBT, Glass reinforced, rated UL 94V-0

Insulator color: Black

Contacts: Phosphor Bronze

Plating:

Tin over Copper underplate overall

Electrical:

Operating voltage: 500 VAC max

Current rating: 1 Amp max

Contact resistance: 20 mohms max initial

Insulation resistance: 1,000 Mohms min

Temperature Rating:

Operating temperature: -55°C to +150°C

Environmental:

Lead free, RoHS compliant

Recommended soldering temp: 235°C for 5 seconds

Positions: 1 thru 40 per row
 A = .100 [2.54] x No. of Positions
 B = .100 [2.54] x No. of Spaces

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: SINGLE ROW IC SOCKET
 .100" ROW SPACING, TIN PLATED

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXX ± .010

APPROVALS

DRAWN	SS	1/28/05
CHECKED		
APPROVED		

SIZE	PART NO.	REV.
X	SIS-XX-T	A
REF: S0009C	SCALE: NTS	SHEET 1 OF 1

6

5

4

3

2

1