

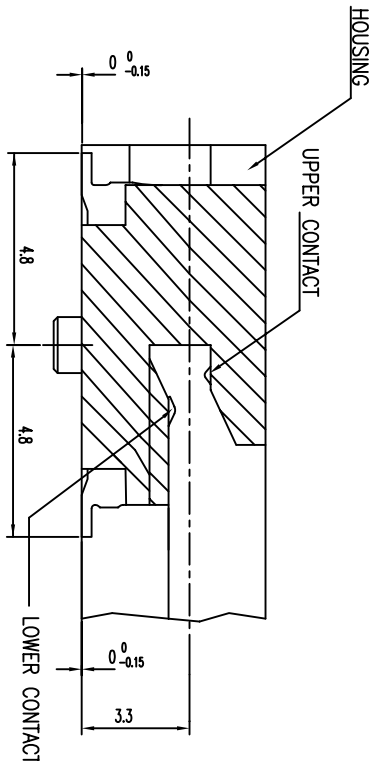
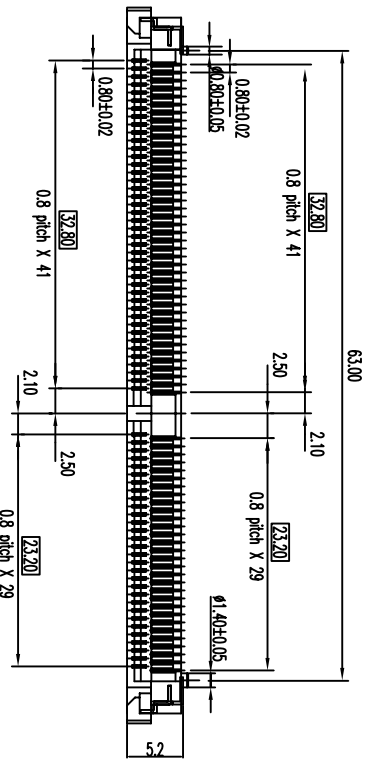
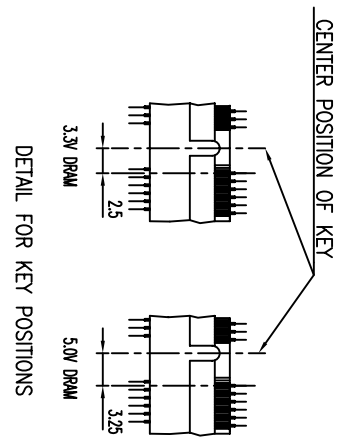


Rev	AWO #	Description	Date	Appr
-		RELEASED	6/29/06	

APPROVED: _____ TITLE: _____
 DATE: _____



SECT "A"- "A" (S=4/1)

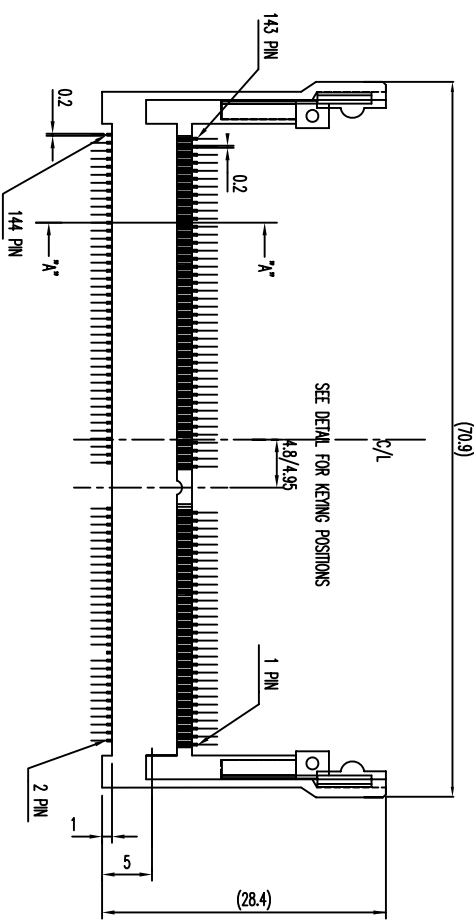

REVERSE LAYOUT CONFIGURATION

Part No.	Voltage Key
SOD-144-S-1-RL	3.3V
SOD-144-S-2-RL	5.0V

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

SO DIMM SOCKET, 144 PIN, SURFACE MNT
 3.3/5.0V KEY, SELECTIVE GOLD

- Plating: Gold Flash over Nickel underplate on contact area, Tin over Copper underplate on solder tails
- Electrical:
 Operating voltage: 25 VAC max
 Current rating: 0.3 amps max
 Contact resistance: 30 mohms max @ 500 VDC
 Insulation resistance: 250 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 250 VAC for 1 minute
- Temperature Rating:
 Operating temperature: -40°C to +85°C
- Environmental:
 Lead free, RoHS compliant
 Recommended soldering temp: 260 for 5 sec



UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE MM [INCHES]
 TOLERANCES: EXCEPT AS NOTED

INCHES	HOLDS
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010

APPROVALS	DATE
DRAWN SS	6/29/06
CHECKED	
APPROVED	

SIZE	PART NO.	REV.
X	SOD-144-S-X-RL	-

SCALE: NTS SHEET 1 OF 2