

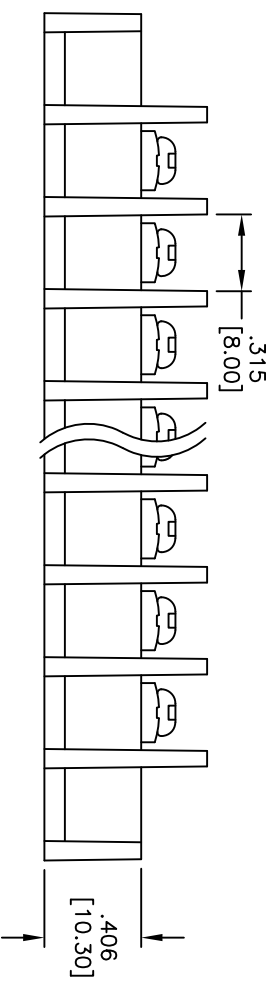


Rev	AWO #	Description	Date	Appr
-		RELEASED	6/07/10	

APPROVED: _____
 DATE: _____ TITLE: _____

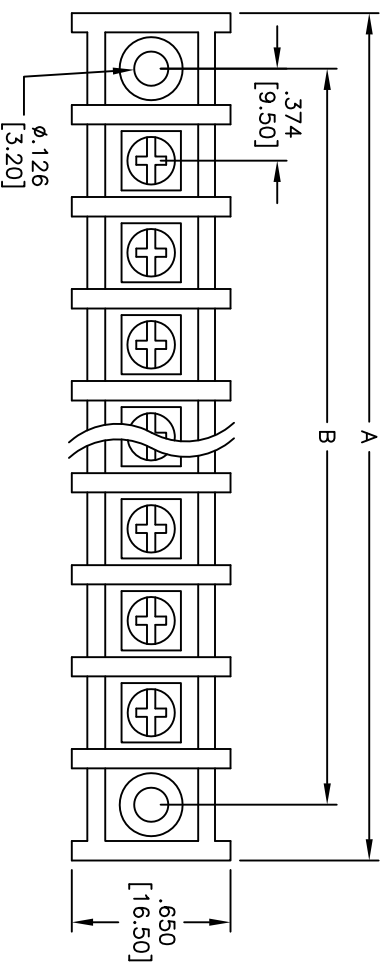

SPECIFICATIONS:

Material:
 Insulator: Nylon 66, rated UL 94V-0
 Insulator color: Black
 Contacts: Brass, Tin Plated
 Screws: M3.5, Nickel Plated Steel
Electrical:
 Operating voltage: 300 VAC max.
 Current rating: 15 Amps max.
 Insulation resistance: 500 Mohms min. @ DC500V
 Dielectric withstanding voltage: 2,000 VAC for 1 minute
Mechanical:
 Wire Range Awg: 12 - 22 STR
 Screw Torque Value: 12Kg-cm
 Temperature Rating:
 Operating temperature: -40°C to +105°C
 Environmental:
 Lead free, RoHS compliant
 Recommended soldering temp: 235°C for 5 seconds

Positions: 2 thru 32
 $A = .374 [9.50] \times \text{No. of Poles} + .827 [21.00]$
 $B = .374 [9.50] \times \text{No. of (Poles + 1)}$

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES. [MM]
 TOLERANCES: EXCEPT AS NOTED

INCHES	HOLDS
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010

APPROVALS

DATE	DATE

DRAWN: DY 6/07/10
 CHECKED: _____
 APPROVED: _____

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .374 [9.50] CENTERLINE BARRIER BLOCK,
 VERTICAL, MOUNT ENDS

SIZE: X PART NO.: TBF-XX-00-M
 REF: S0031T SCALE: NTS SHEET 1 OF 1

