
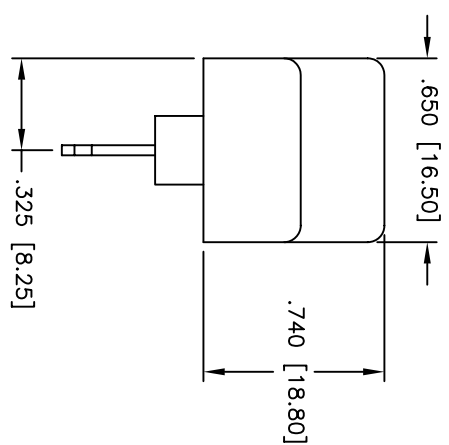
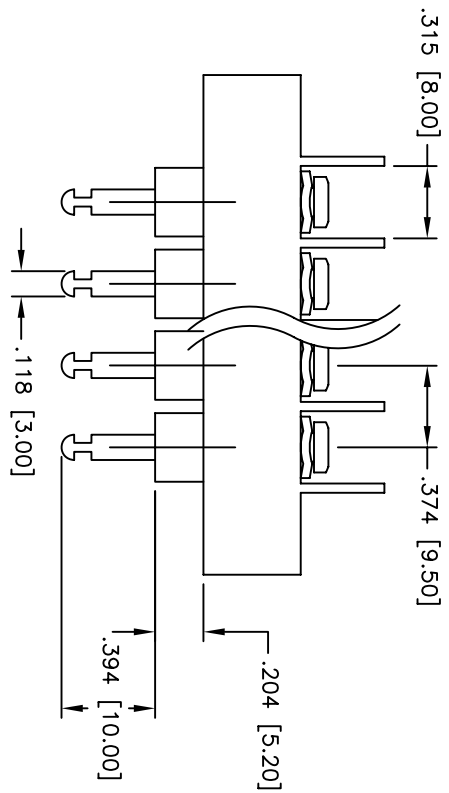


Rev	AWO #	Description	Date	Appr
-	7456	RELEASED	01/31/07	

APPROVED: _____
 DATE: _____ TITLE: _____

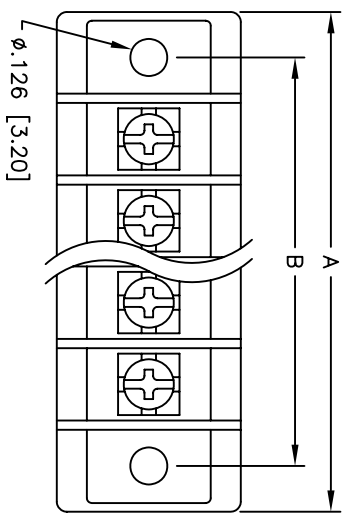

SPECIFICATIONS:

- Material: PBT, rated UL 94V-0
- Insulator color: Black
- Plating: Brass, Tin plated
- Contacts: Steel, Nickel plated
- Hardware: Brass, Tin plated
- Electrical:
 - Operating voltage: 300 VAC max.
 - Current rating: 15 Amps max.
 - Contact resistance: 20 mohms max. initial
 - Insulation resistance: 500 Mohms min.
 - Dielectric withstanding voltage: 2,000 VAC for 1 minute
- Mechanical:
 - Wire range: 22 - 14 AWG
 - Operating temperature: -65°C to +125°C
- Environmental: Lead free, RoHS compliant

Positions: 2 thru 32
 A = .374 [9.50] x No. of Positions + .827 [21.00]
 B = .374 [9.50] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	HOLDS
.X ± .10	ØX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN	BW
CHECKED	
APPROVED	

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .374 [9.50] CENTERLINE BARRIER BLOCK
 TURRETT TERMINALS, MOUNT ENDS

SIZE: X
 PART NO.: TBF-XX-05-M-WB
 SCALE: NTS
 SHEET 1 OF 1

