Rev	AWO #	Description	Date	Appr
-		RELEASED	01/25/06	

APPROVED: _____

DATE: _____ TITLE: _____

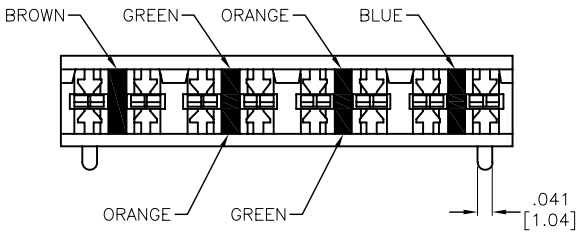

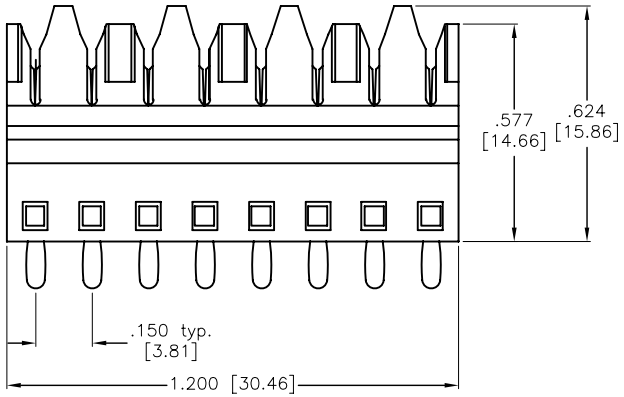



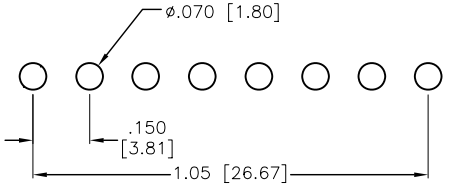

RECOMENDED
PCB LAYOUT

SPECIFICATIONS:
Material:
Insulator: PC, glass reinforced, rated UL 94V–0
Insulator color: White
Contacts: Phosphor Bronze
Plating:
Tin over Copper underplate
Electrical:
Operating voltage: 250 VDC max
Current rating: 15 Amps max
Contact resistance: 15 mohms max
Insulation resistance: 500 Mohms min @ 500 VDC
Dielectric withstanding voltage: 1000 VAC for 1 minute
Temperature Rating:
Operating temperature: –20°C to +80°C
Environmental:
Lead free, RoHS compliant.
Recommended soldering temp: 235 for 5 sec.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	SS	01/25/06
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: 110 IDC TERMINAL BLOCK, 8 POSITION PCB WITH COLOR MARKERS

SIZE	PART NO.	REV.
X	TBI-08-3.81-CM1	-

REF: | SCALE: NTS | SHEET 1 OF 1