
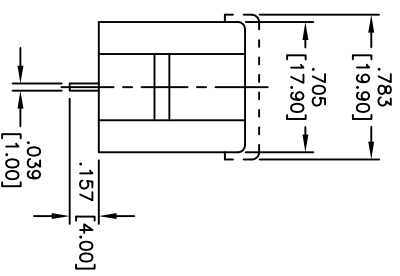
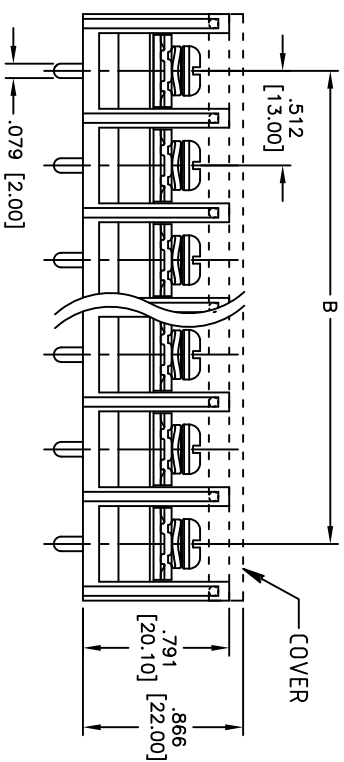


Rev	AWO #	Description	Date	Appr
-		RELEASED	3/30/11	

APPROVED: _____
 DATE: _____ TITLE: _____

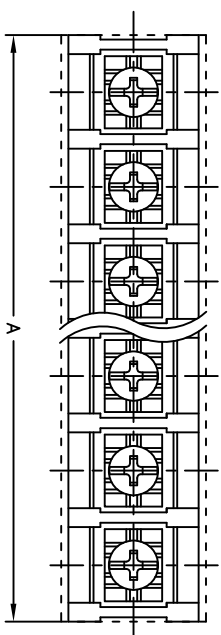

A = .512 [13.00] x No. of Poles + .102 [2.60]
 B = .512 [13.00] x No. of (Poles-1)

SPECIFICATIONS:
 Material: Insulator: Polyamide, rated UL 94V-0
 Insulator color: Black
 Contacts: Brass, Tin plated
 Screws: Steel, M4, Nickel plated
 Electrical:
 Operating voltage: 600 VAC
 Current rating: 35 Amps
 Insulation resistance: 1000 Mohms min. @ DC 500V
 Insulation withstands voltage: 2,000 VAC for 1 minute
 Mechanical:
 Wire range: 18 – 10 AWG
 Screw Torque Value: 18kg-cm
 Temperature Rating:
 Operating temperature: -40°C to +110°C
 Environmental:
 Lead free, RoHS compliant

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

**TERMINAL BLOCK, .512" [13.00] PITCH,
 CLOSED SIDE, EXIT PCB TAIL**

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010
APPROVALS	DATE
DRAWN DY	3/30/11
CHECKED	
APPROVED	

SIZE	PART NO.	REV.
X	TBW-XX-02-B-COV	-
REF: S00035T	SCALE: NTS	SHEET 1 OF 1

