
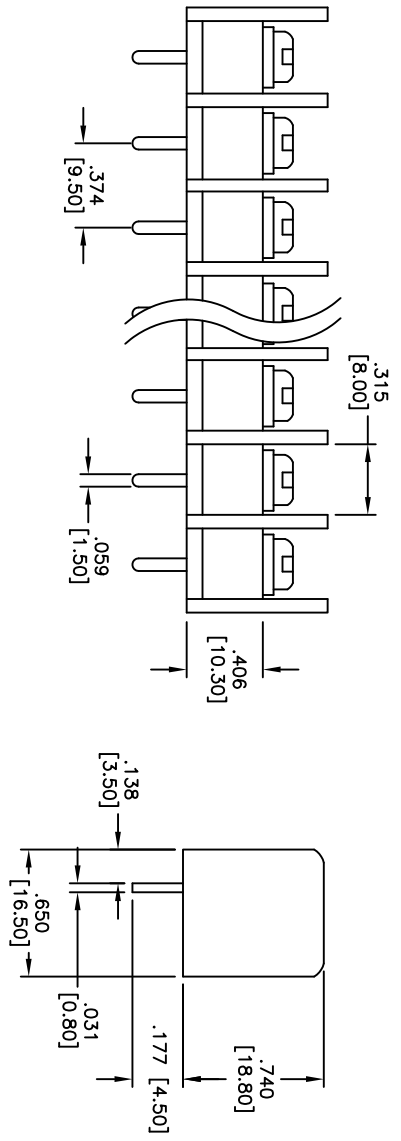


Rev	AWO #	Description	Date	Appr
-	11222	RELEASED	3/28/11	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

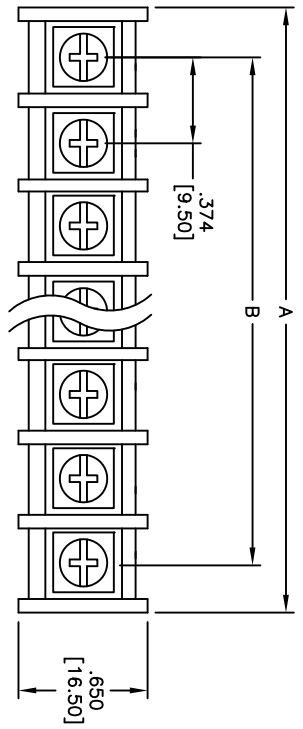

Poles: 2 thru 32  
 A = .374 [9.50] x No. of Poles + .079 [2.00]  
 B = .374 [9.50] x No. of (Poles-1)

**SPECIFICATIONS:**  
 Material: Insulator: Nylon66, rated UL 94V-0  
 Insulator color: Black  
 Contacts: Brass, Tin plated  
 Screws: M3.5, Nickel plated Brass  
 Electrical:  
 Operating voltage: 300 VAC max.  
 Current rating: 15 Amps max.  
 Insulation resistance: 1000 Mohms min. @ DC 500V  
 Insulation withstands voltage: 2,000 VAC for 1 minute  
 Mechanical:  
 Wire range: 22 - 14 AWG  
 Temperature Rating:  
 Operating temperature: -40°C to +120°C  
 Environmental:  
 Lead free, RoHS compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010
APPROVALS	DATE
DRAWN	DY
CHECKED	
APPROVED	

**ADAM TECH**  
 909 Railway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: BARRIER STRIP, .374" [9.50] PITCH  
 STRAIGHT, PCB THRU HOLE

SIZE: PART NO.: TBY-XX-01-B  
 REF: S00031T SCALE: NTS SHEET 1 OF 1