
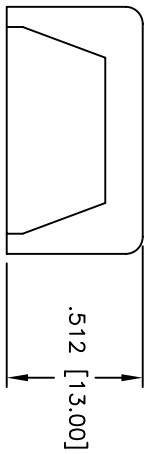
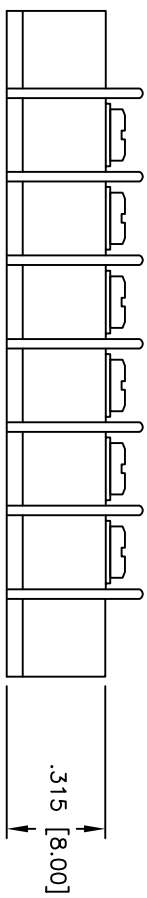


Rev	AWO #	Description	Date	Appr
-		RELEASED	6/22/07	

APPROVED: _____
 DATE: _____ TITLE: _____

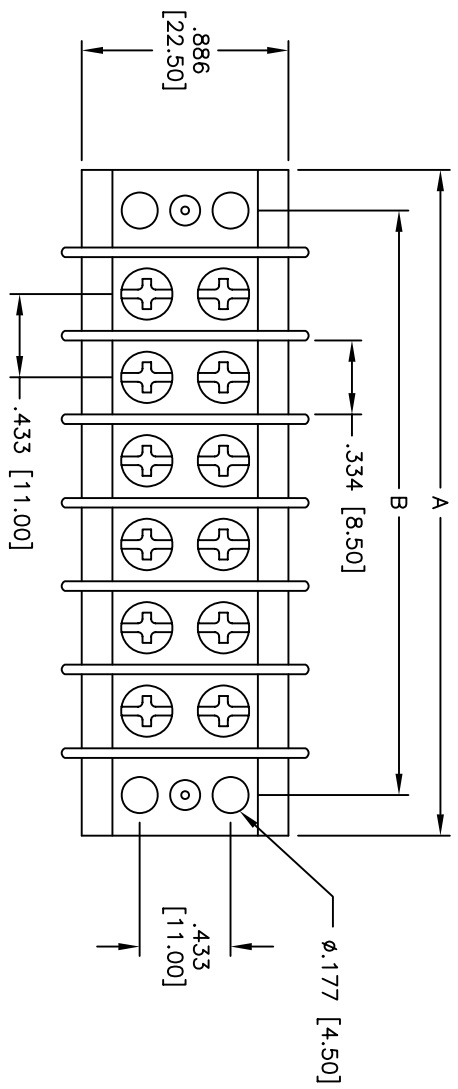

Positions: 2 thru 26
 A = .433 [11.00] x (No. of Poles + 1) per row + .382 [9.70]
 B = .433 [11.00] x (No. of poles + 1) per row

SPECIFICATIONS:

- Material: Phenolic, glass reinforced, rated UL 94V-0
- Insulator color: Black
- Plating:
 - Contacts: Brass, Tin plated
 - Screws: Steel, Nickel plated
 - Hardware: Brass, Tin plated
- Electrical:
 - Operating voltage: 300 VAC max.
 - Current rating: 20 Amps max.
 - Contact resistance: 20 mohms max. initial
 - Insulation resistance: 500 Mohms min. @ 500 VDC
 - Dielectric withstanding voltage: 2,000 VAC for 1 minute
- Mechanical:
 - Wire range: 18 - 12 AWG
 - Temperature Rating: Operating temperature: -40°C to +100°C
- Environmental: Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	ØX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010
APPROVALS	DATE
DRAWN SS	6/22/07
CHECKED	
APPROVED	

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE	.433 [11.00] DUAL ROW BARRIER BLOCK	
SIZE	PART NO.	REV.
X	TDB-XX	-
REF:	SCALE: NTS	SHEET 1 OF 1