
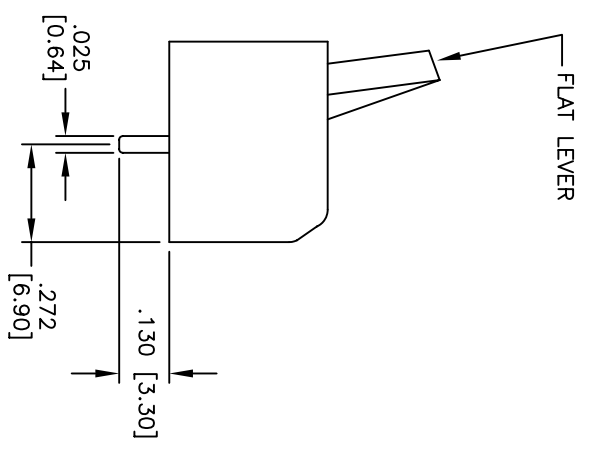
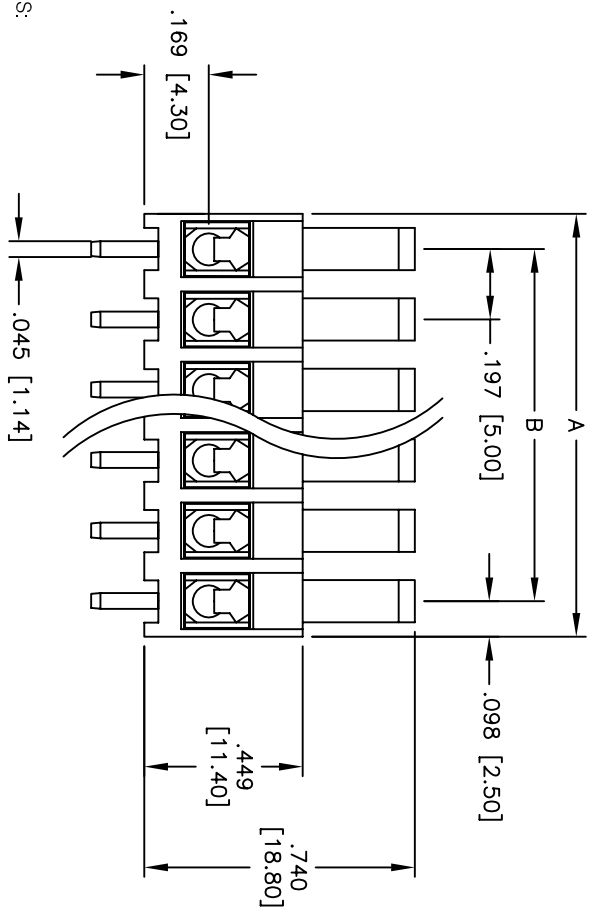


Rev	AWO #	Description	Date	Appr
-		RELEASED	3/3/06	

APPROVED: _____
 DATE: _____ TITLE: _____

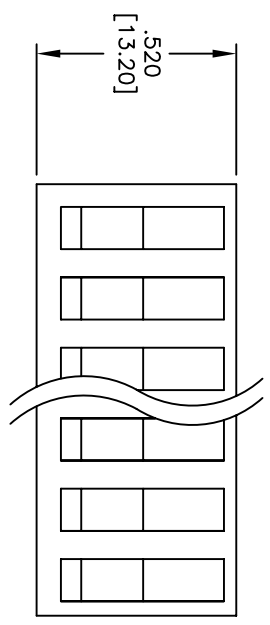

A = .197 [5.00] x No of Poles
 B = .197 [5.00] x (No. of Poles - 1)

SPECIFICATIONS:
 Material: Insulator: PBT, glass reinforced, rated UL94V-0
 Insulator color: Green
 Metal cage: Brass, Tin plated
 Electrical:
 Operating voltage: 300 VAC max.
 Current rating: 10 Amps max.
 Contact resistance: 20 mohms max. initial
 Insulation resistance: 5,000 Mohms min.
 Dielectric withstanding voltage: 1,500 VAC for 1 minute
 Mechanical:
 Wire range: 18 to 22 AWG Stranded
 Temperature Rating: Operating temperature: -55°C to +105°C
 Environmental: Lead free, RoHS compliant.
 Recommended soldering temp: 235 for 5 sec.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	HOLDERS
.X ± .10	ØX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN	SS
CHECKED	
APPROVED	

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710
 TITLE: .197 [5.00] CENTERLINE FLAT LEVER
 PCB

SIZE	PART NO.	TSE-XX-C-FL	REV.
X			-
REF:	SCALE:	NTS	SHEET 1 OF 1

6 5 4 3 2 1