
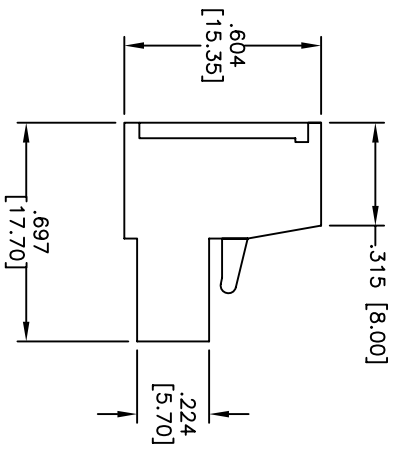
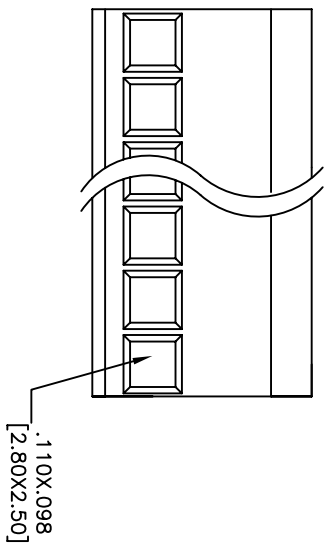


APPROVED: _____
 DATE: _____ TITLE: _____

| Rev | AWO # | Description | Date | Appr |
|-----|-------|--------------|------------|------|
| - | | Released | 12/18/2003 | |
| A | | Redrawn | 10/26/07 | SS |
| B | | REVISED DIM. | 12/31/08 | |

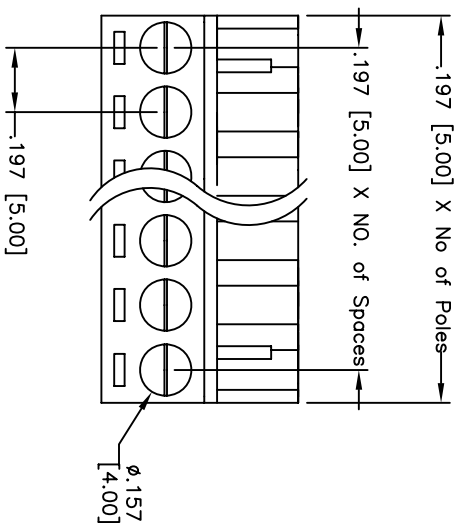

SPECIFICATIONS:
 Material: Insulator: Thermoplastic, rated UL94V-0
 Insulator color: Green
 Metal cage: Phosphor Bronze, Nickel plated
 Screw: Steel, Zinc plated
 Electrical:
 Operating voltage: 250 VAC max.
 Current rating: 12 Amps max.
 Insulation resistance: 500 Mohms min.
 Dielectric withstanding voltage: 2,000 VAC for 1 minute
 Mechanical:
 Wire range: 12 to 16 AWG Stranded
 Temperature Rating:
 Operating temperature: -55°C to +105°C
 Environmental:
 Lead free, RoHS compliant.

ROHS COMPLIANT

| | |
|---|--------------|
| UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES [MM] | |
| TOLERANCES EXCEPT AS NOTED | |
| INCHES | HOLDS |
| .X ± .10 | ØXX ± .10 |
| .XX ± .020 | ØXXX ± .015 |
| .XXX ± .015 | ØXXXX ± .010 |
| APPROVALS | DATE |
| DRAWN TD | 12/18/2003 |
| CHECKED | |
| APPROVED | |

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

| | | | |
|--------|----------|-----------------------------------|--------------|
| TITLE | | TERMINAL BLOCK, 0.5mm, 02-24 POLE | |
| SIZE | PART NO. | TSF-XX | REV. B |
| REF: X | S00036T | SCALE: NTS | SHEET 1 OF 1 |

6 5 4 3 2 1