
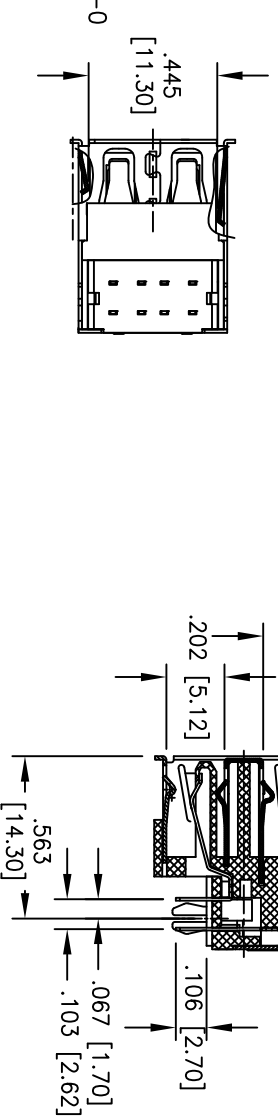


Rev	AWO #	Description	Date	Appr
-		RELEASED	12/10/09	

APPROVED: _____ TITLE: _____
 DATE: _____

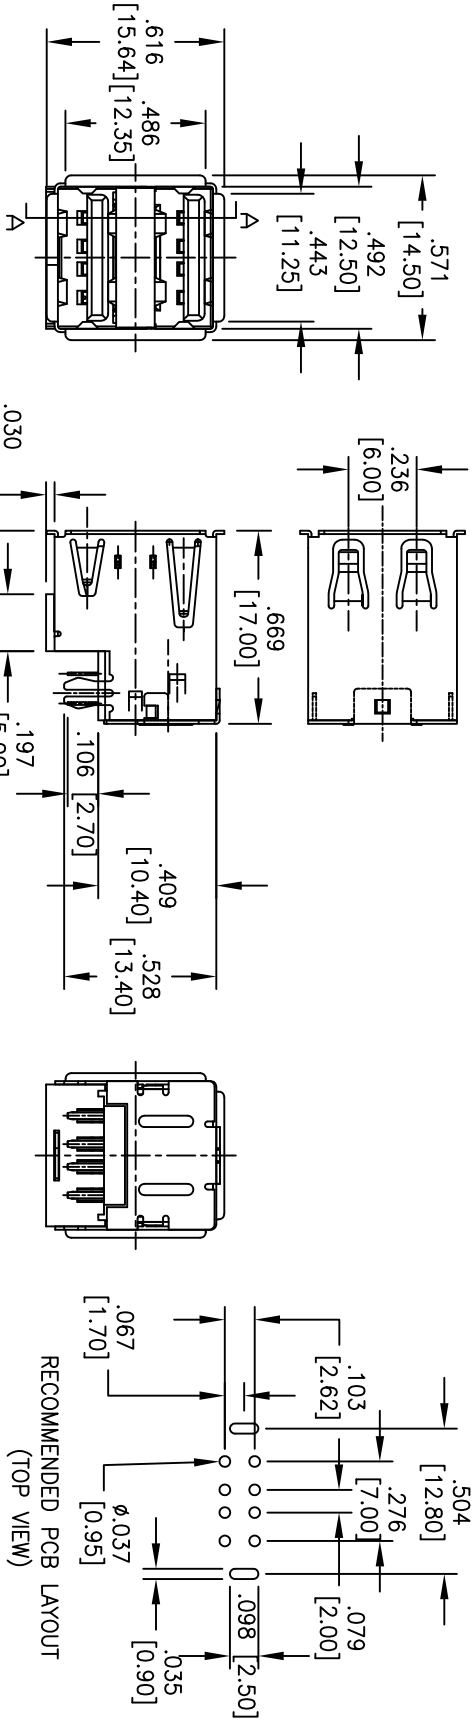

SPECIFICATIONS:

- Material: Insulator: PBT, Glass filled, rated UL 94V-0
- Insulator color: White
- Contacts: Phosphor Bronze
- Shell: Brass, nickel plated
- Plating: 50U " Gold over Nickel underplate on contact area.

- Electrical: Operating voltage: 30 VAC max.
- Current rating: 1 Amp max @ 250V AC
- Contact resistance: 30 mohms max.
- Insulation resistance: 1000 Mohms min.
- Dielectric withstanding voltage: 500 VAC for 1 minute
- Temperature Rating: Operating temperature: -20°C to +60°C

Environmental: Lead free, RoHS compliant.
 Recommended soldering temp: 235°C for 5 sec.



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]		TOLERANCES: EXCEPT AS NOTED	
INCHES		HOLES	
X	± .10	ØXX	± .10
.XX	± .020	ØXXX	± .015
.XXX	± .015	ØXXXX	± .010
APPROVALS		DATE	
DRAWN	DY	12/10/09	
CHECKED			
APPROVED			
TITLE		PART NO.	
UNIVERSAL SERIAL BUS, TYPE A		USB-A-D-RA-EH1-30-WT	
FEMALE, RIGHT ANGLE, DIP TYPE		SCALE: NTS	
REF: S00M5C		SHEET 1 OF 1	