
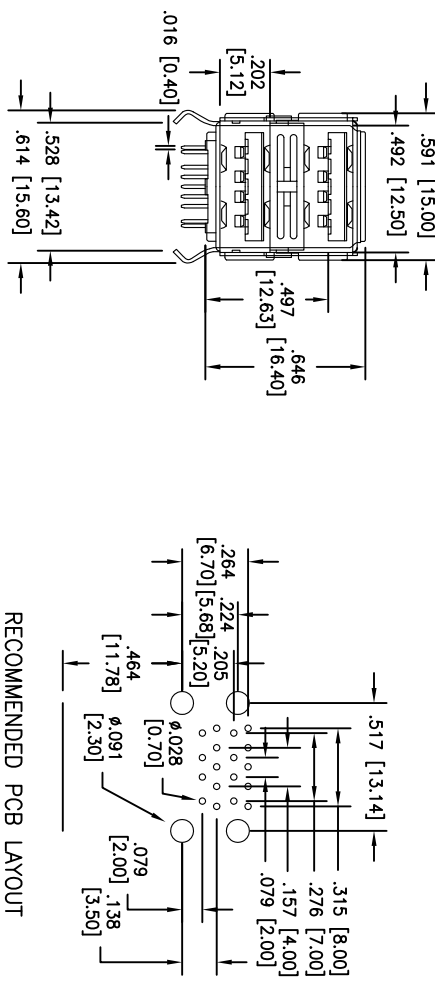


Rev	AWO #	Description	Date	Appr
-		RELEASED	12/3/10	

APPROVED: _____
 DATE: _____ TITLE: _____

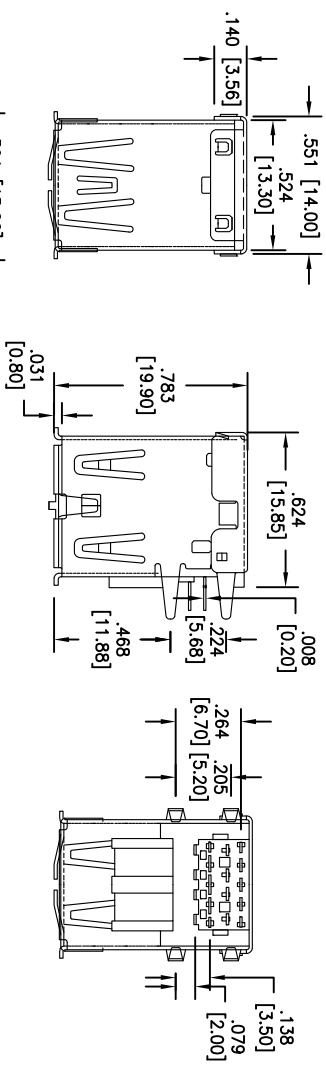

PIN NUMBER	SIGNALNAME
1	VBUS
2	D-
3	D+
4	GND
5	StdA_SSRX-
6	StdA_SSRX+
7	GND_DRAIN
8	StdA_SSTX-
9	StdA_SSTX+
	SHELL Shield

SPECIFICATIONS:

Material:
 Insulator: Thermoplastic, rated UL 94V-0
 Insulator color: Blue
 Contacts: Copper Alloy
 Shell: Iron Alloy, Nickel plated
Plating:
 Gold over Nickel underplate on contact area,
 Tin over Copper underplate on solder tails.
Electrical:
 Current rating: 1.5 A
 Contact resistance: 30 mohms max.
 Insulation resistance: 1000 Mohms min.
 Dielectric withstanding voltage: 500 VAC for 1 minute
 Operating temperature: -40°C to +85°C
Environmental:
 Lead free, RoHS compliant.
 Recommended soldering temp: 235°C for 5 sec.



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: UNIVERSAL SERIAL BUS, TYPE A
 RIGHT ANGLE, DUAL PORT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MM TOLERANCES: EXCEPT AS NOTED INCHES		HOLES		DATE	
X	± .10	ØX	± .10	DATE	
XX	± .020	ØXXX	± .015	DATE	
XXX	± .015	ØXXX	± .010	DATE	
APPROVALS					
DRAWN	AY			12/3/10	
CHECKED	AH			12/3/10	
APPROVED					
SIZE	PART NO.	SCALE:	NIS	SHEET	1 OF 1
X	USB-A3-D-RA				
REF:	S00042C				