
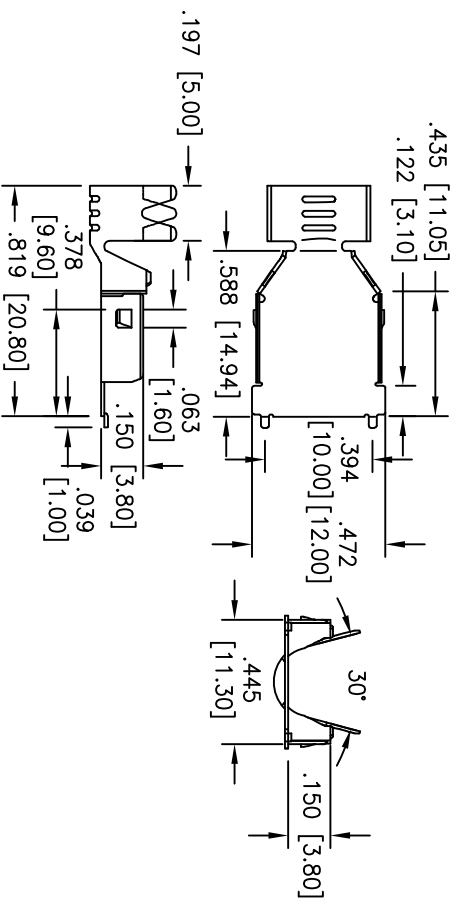
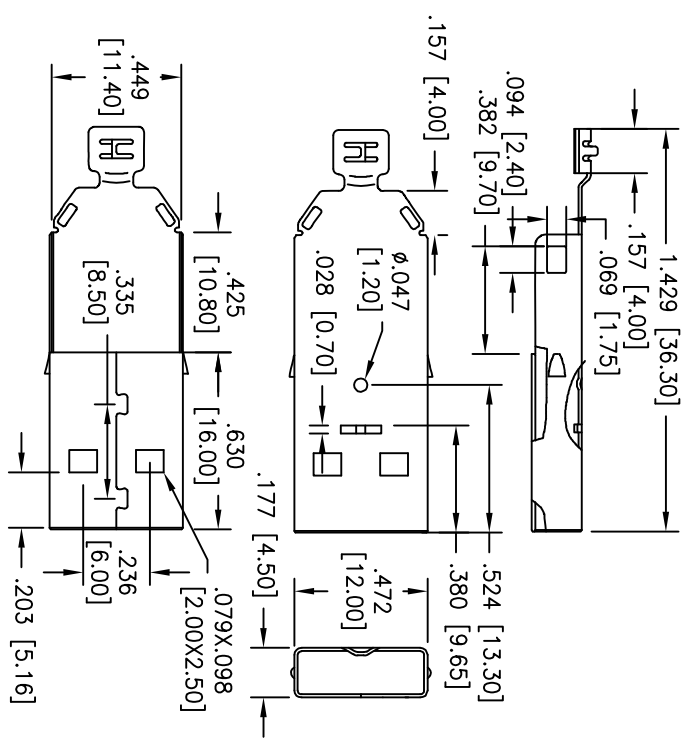



Rev	AWO #	Description	Date	Appr
-		RELEASED	12/3/10	

APPROVED: _____
 DATE: _____ TITLE: _____

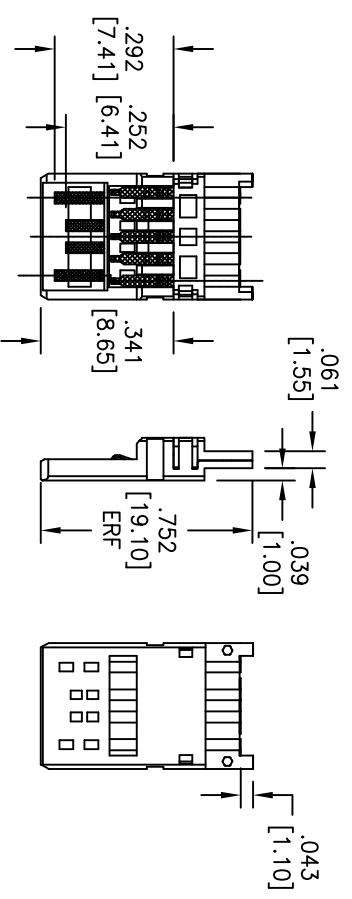

SPECIFICATIONS:

- Material: Insulator: PBT, roted UL 94V-0
- Insulator color: Blue
- Contacts: Phosphor Bronze
- Shell: Steel, Nickel plated

Plating: Gold flash over Nickel underplate overall

Electrical: Contact resistance: 50 mohms max.

Insulation resistance: 100 Mohms min.

Dielectric withstanding voltage: 100 VAC for 1 minute

Operating temperature: -40°C to +85°C

Environmental: Lead free, RoHS compliant.
 Recommended soldering temp: 235°C for 5 sec.



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

UNIVERSAL SERIAL BUS 3.0, TYPE A PLUG

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
X ± .10	ØX ± .10
XX ± .020	ØXX ± .015
XXX ± .015	ØXXX ± .010
APPROVALS	
DRAWN	AY
CHECKED	AH
DATE	12/3/10

SIZE	PART NO.	REV.
X	USB-AP3-SA	-

REF: S00042C SCALE: NTS SHEET 1 OF 1