
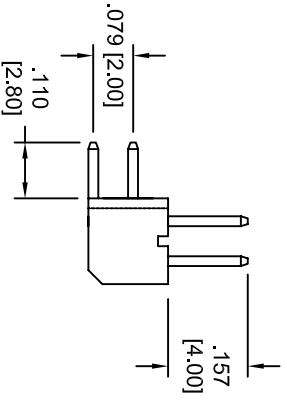
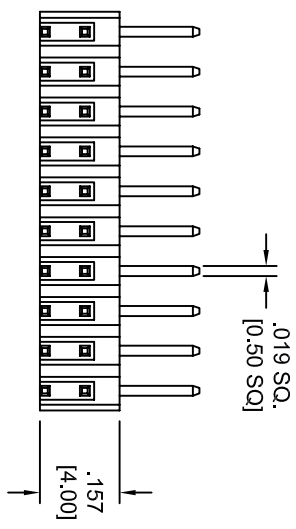
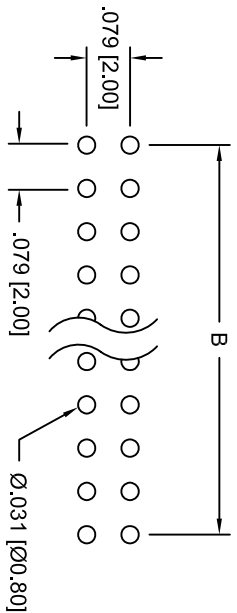


Rev	AWO #	Description	Date	Appr
-		RELEASED	9/20/04	

APPROVED: _____
 DATE: _____ TITLE: _____

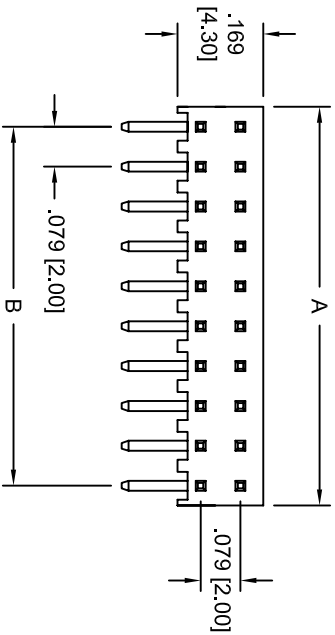

A = .079 [2.00] X No. of Positions / 2
 B = .079 [2.00] X No. of Spaces.

SPECIFICATIONS:

- Material: Insulator: Nylon 6T, rated UL 94V-0
- Insulator color: Black
- Contacts: Brass
- Plating: Gold Flash over Nickel underplate overall
- Electrical: Operating voltage: 250 VAC max
- Current rating: 1 Amps max
- Contact resistance: 20 mohms max. Initial
- Insulation resistance: 5000 Mohms min @ 500 VDC
- Dielectric withstanding voltage: 1000 VAC for 1 minute
- Temperature Rating: Operating temperature: -55°C to +105°C
- Environmental: Lead free, RoHS compliant.
- Recommended soldering temp: 235°C for 5 sec.



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: DUAL ROW PIN HEADER, .079" [2.00mm] PITCH, GOLD PLATED, 2 TO 50 PINS

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED INCHES	
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN SS	10/20/04
CHECKED	
APPROVED	

SIZE X	PART NO. W2PH2R-08-UA	REV. -
REF:	SCALE: NTS	SHEET 1 OF 1