

**INTRODUCTION:**

Adam Tech PC Series International Power Cordset series offers a wide range of cordsets with numerous international approvals for worldwide applications. Each is approved for use by all of the major safety organizations such as UL, CSA & VDE. This series is available in a wide range of cord types with choice of wire gauge and various shielding options. We offer numerous standard Power Cords designed to comply with specific world market requirements and an unlimited variety of custom cords manufactured to our customers specifications.

**FEATURES:**

- Sturdy, high reliability designs
- Worldwide Safety agency approvals
- Standard and Custom Power Cords
- Choice of cord types and shielding options

**MATING CONNECTORS:**

Adam Tech IEC series & power line filters, all international IEC 60320 power connectors.

**SPECIFICATIONS:**

**Material:**

Outer Jacket Color: Black, other colors optional

**Temperature Rating:**

Outer Jacket Temperature: 60°C (75°C and 105°C optional)

**PACKAGING:**


Corrugated boxes

**SAFETY AGENCY APPROVALS:**

UL/CSA Recognized File No. E167153  
VDE Approved



**ORDERING INFORMATION**

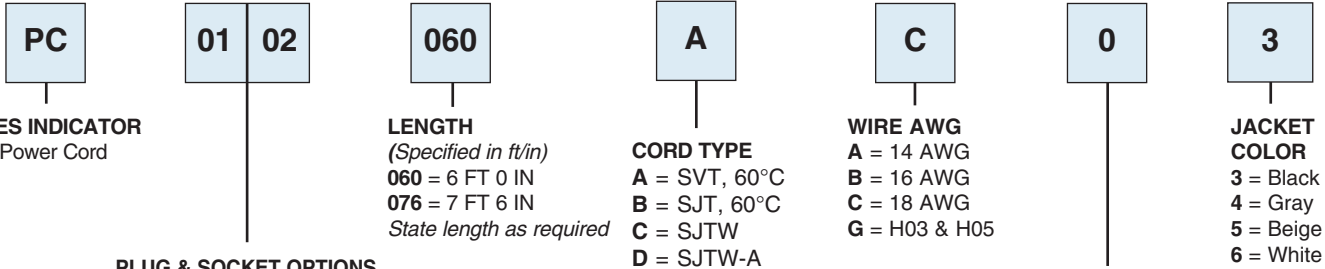

**SERIES INDICATOR**  
PC = Power Cord

**PLUG & SOCKET OPTIONS**

- 01 = American, NEMA 5-15P Straight
- 01H = North American Hospital Grade NEMA 5-15
- 01HB = Color Black
- 01HC = Color Clear
- 01HG = Color Gray
- 02 = International Female, IEC C13 straight
- 03 = International Female, IEC C13 R/A
- 04 = International Male, IEC C14
- 06 = European, CEE 7/7 Straight
- 07 = European, CEE 7/7 R/A
- 08 = United Kingdom Fused, BS 1363
- 10 = American, NEMA 1-15P Straight Non Polarized
- 11 = Swiss, SEV 1011 Straight
- 12 = Italian, CEI 23-16 Grounded
- 13 = Australian, AS 3112 Grounded
- 15 = Jacket and Conductor Stripped, Jacket 2.0" / Conductors 0.37" (Consult factory for custom jacket and conductor strip lengths)
- 16 = Blunt Cut
- 17 = International Female, IEC C7
- 25 = American, NEMA 5-15P R/A
- 28 = European, CEE 7/16 Straight
- 29 = Italian, CEI 23-16
- 30 = International Female, IEC C5
- 31 = Danish, SRAF
- 32 = South African, BS-546
- 33 = South African, BS-546 R/A
- 34 = Israel, SI-32 R/A
- 35 = Australian, AS 3112
- 38 = European, CEE 7/17 Straight

- CORD TYPE**
- A = SVT, 60°C
  - B = SJT, 60°C
  - C = SJTW
  - D = SJTW-A
  - E = SPT-1
  - F = SPT-2
  - G = SPT-3
  - H = H03VV-F 3X0.75mm
  - I = H05VV-F 3X0.75mm
  - J = H05VV-F 3X1.0mm
  - K = H03VV-H 2X0.75mm
  - L = H05VV-F 3X0.75mm
  - M = SPT-1 NON-INTEGRAL
  - N = SPT-2 NON-INTEGRAL
  - R = SJT, CEE
  - S = SVT, CEE
  - Q = SJT, 105°C
  - V = SVT, 105°C

- WIRE AWG**
- A = 14 AWG
  - B = 16 AWG
  - C = 18 AWG
  - G = H03 & H05

- SHIELDING**
- 0 = Non Shielded
  - F = Foil Shield
  - S = Copper Braid and Foil Shield

- JACKET COLOR**
- 3 = Black
  - 4 = Gray
  - 5 = Beige
  - 6 = White



## PLUG ENDS BY PART NUMBER & DESCRIPTION

