

INTRODUCTION:

Adam Tech RCA Series RCA jacks are a popular choice for audio and visual output in electronic equipment applications. Adam Tech offers a multitude of RCA jacks intended to satisfy most audio and visual applications. This series offers choices of panel, PCB, and chassis mounting in single, dual, stacked and color coded versions with a number of shell plating options. Adam Tech RCA jacks are precision engineered to provide intermatability and balance to a broad range of industry standard plugs. Manufactured with high quality UL94V-0 ABS these jacks are an excellent choice for most audio and visual applications.

FEATURES:

- Wide range of colors
- Multiple port versions
- Various body styles
- Industry Standard compatibility

MATING PLUGS:

All industry standard RCA plugs.

SPECIFICATIONS:

Material:

Standard insulator: ABS or PBT glass filled, rated UL94-HB
 Optional Hi-Temp insulator: Nylon 6T, rated UL94V-0
 Insulator Colors: Red, Black, Yellow, White
 Bushing: Brass, Nickel plated, (Gold optional)
 Contacts: Brass

Contact Plating:

Tin or Silver over copper underplate

Electrical:

Operating voltage: 12V DC max.
 Current rating: 1 Amp max.
 Contact resistance: 30 mΩ max. initial
 Insulation resistance: 100 MΩ min.
 Dielectric withstanding voltage: 500V AC for 1 minute

Mechanical:

Insertion force: 6.6 lbs max.
 Withdrawal force: 1.7 lbs min
 Mating durability: 5000 cycles min.

Temperature Rating:


Operating temperature: -25°C to +80°C
 Soldering process temperature:
 Standard insulator: 235°C
 Hi-Temp insulator: 260°C

PACKAGING:


Anti-ESD plastic bags

APPROVALS AND CERTIFICATIONS:

UL Recognized File No. E224053
 CSA Certified File No. LR1578596

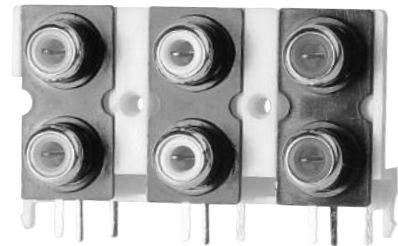





ORDERING INFORMATION

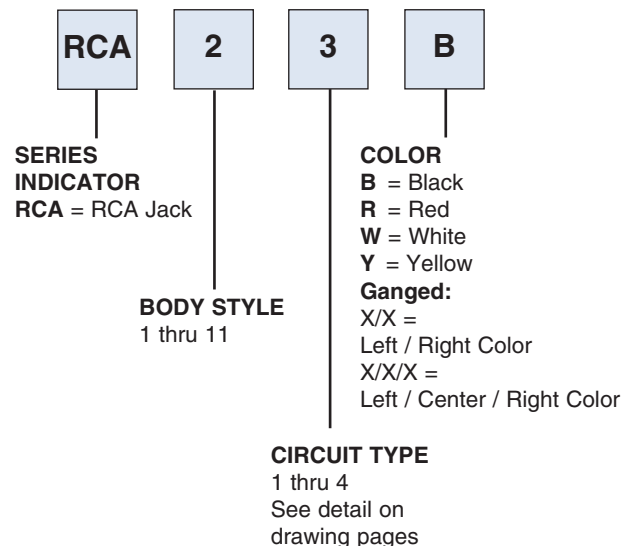


OPTIONS:

Add designator(s) to end of part number
G = Gold plated barrels
HT = Hi-Temp insulator for Hi-Temp soldering processes up to 260°C

RCA-1

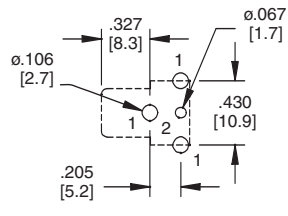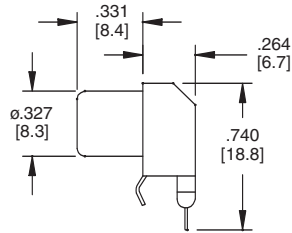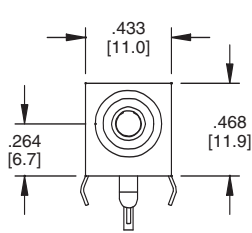





CIRCUIT



RCA-1-1-Y

Recommended PCB Layout

RCA-2

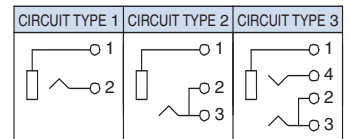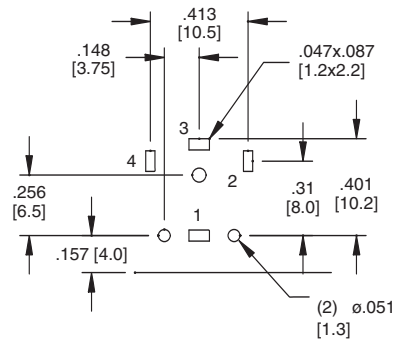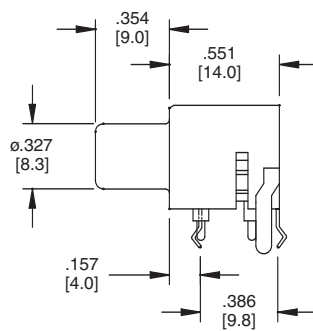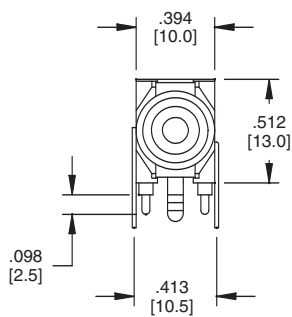





CIRCUIT



RCA-2-2-Y

Recommended PCB Layout

RCA-3

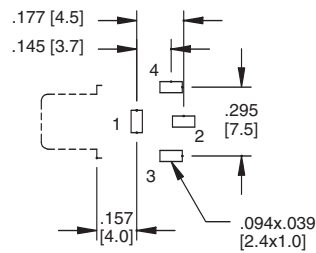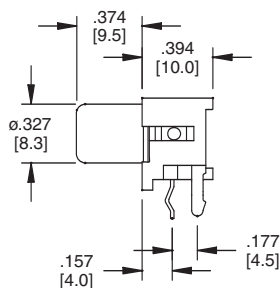


CIRCUIT



RCA-3-1-R

Recommended PCB Layout


RCA-4

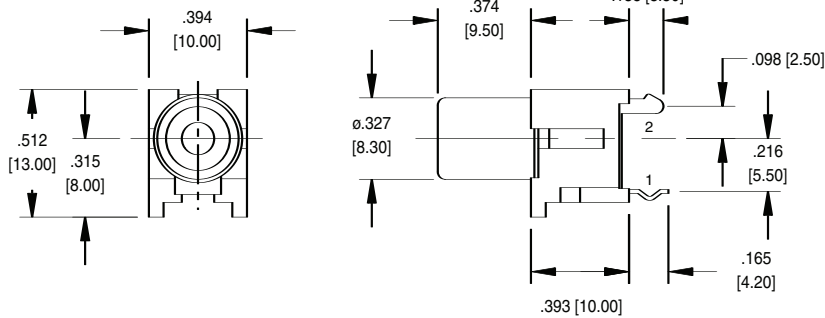


Recommended PCB Layout
(Bottom View)



RCA-4-1-B




RCA-5

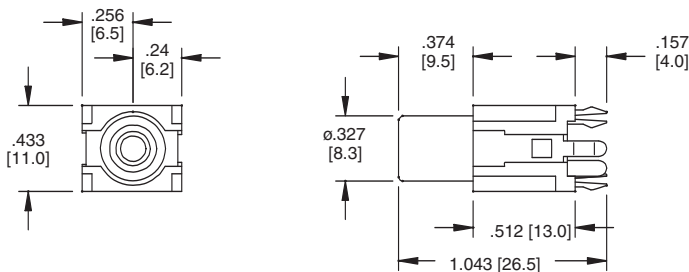



Recommended PCB Layout
(Bottom View)




RCA-5-2-R

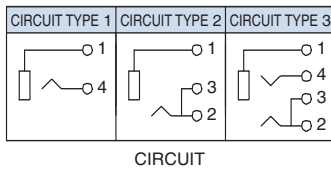

RCA-6


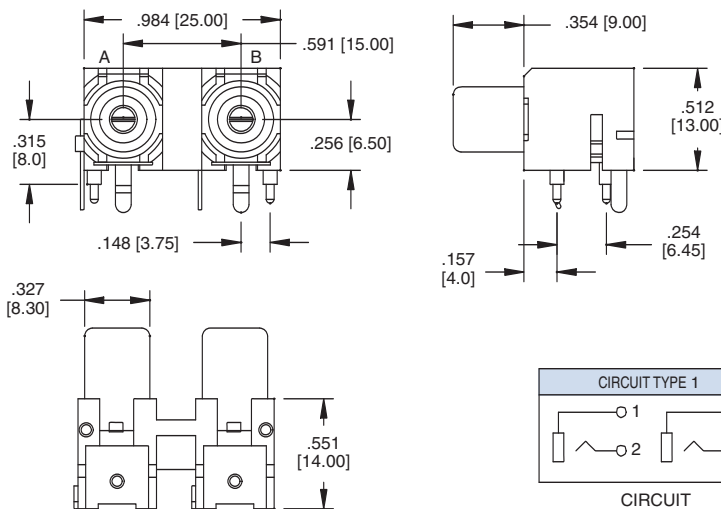


RCA-6-1-R/Y

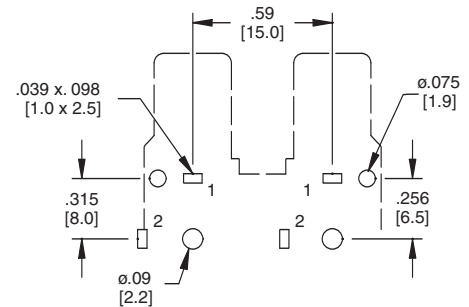


Recommended PCB Layout
(Bottom View)


RCA-7

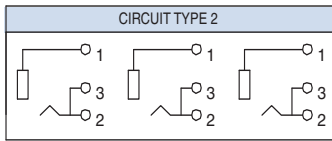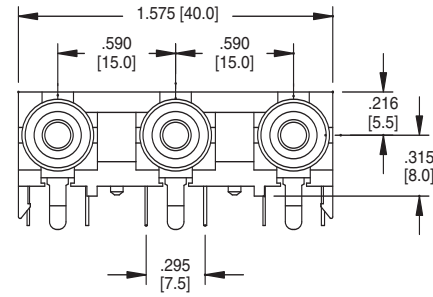

CIRCUIT


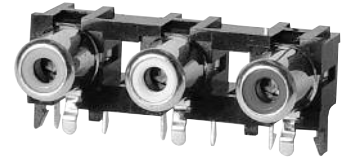


RCA-7-2-Y/W/R

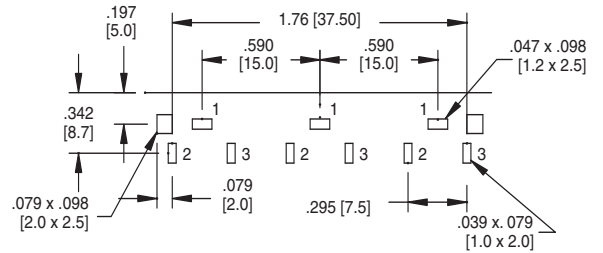

Recommended PCB Layout (Bottom View)


RCA-8

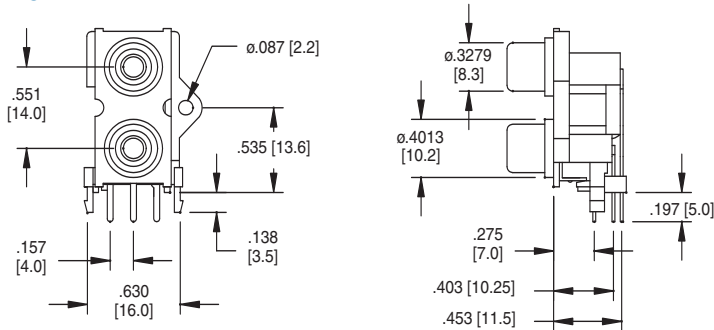

CIRCUIT





RCA-8-4-W/Y

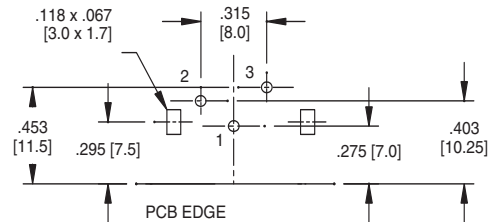

Recommended PCB Layout (Bottom View)


RCA-9

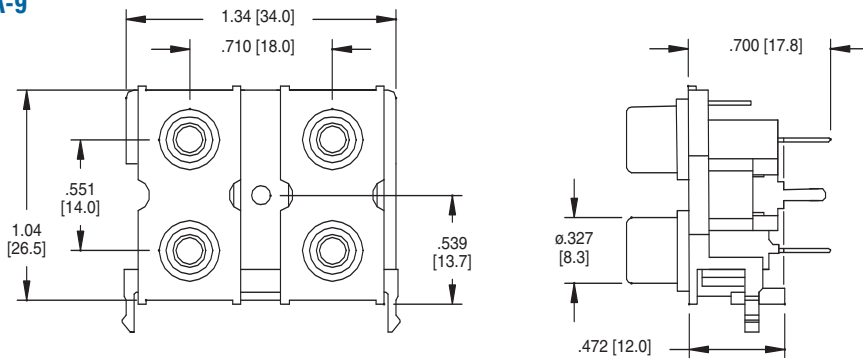

CIRCUIT






RCA-9-4-Y/R

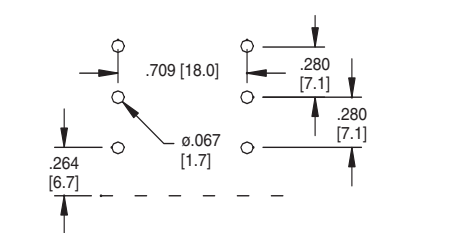


Recommended PCB Layout (Bottom View)

RCA-10


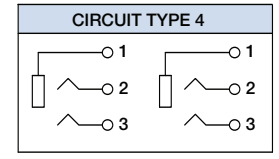
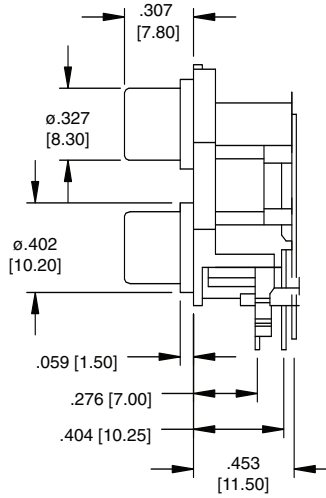
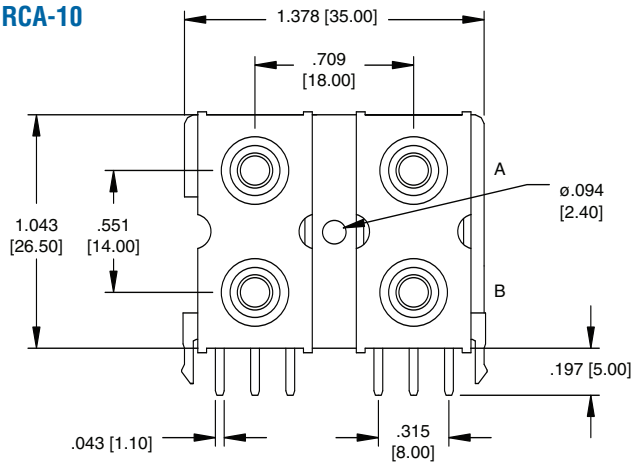


RCA-10-4-W/R

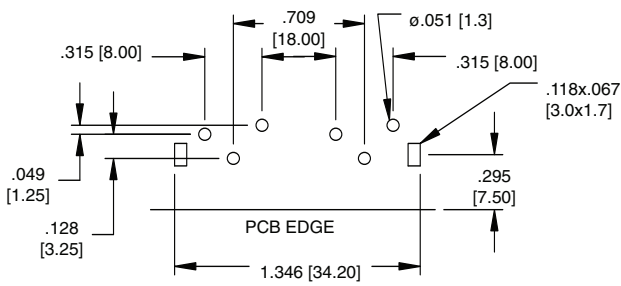


Recommended PCB Layout (Bottom View)

RCA-11

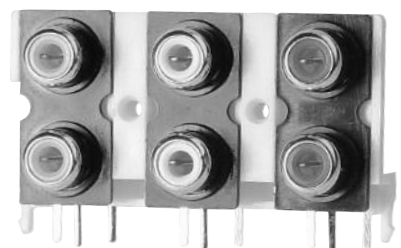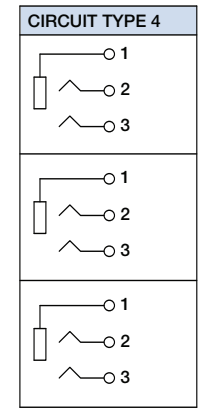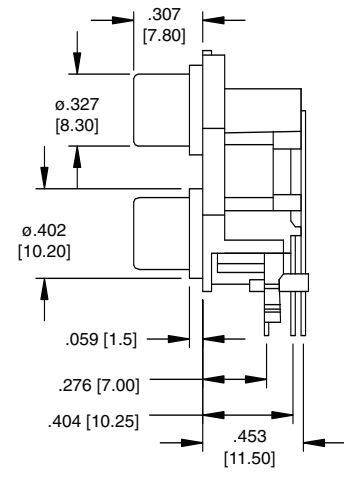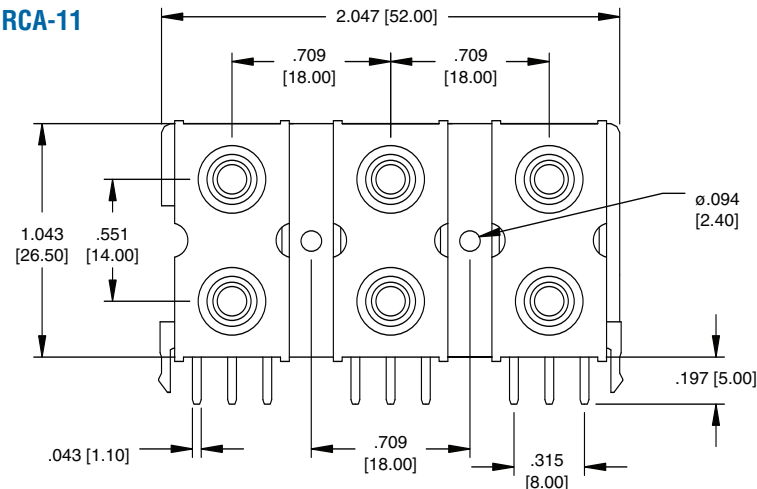

RCA-11-4-Y/W/R

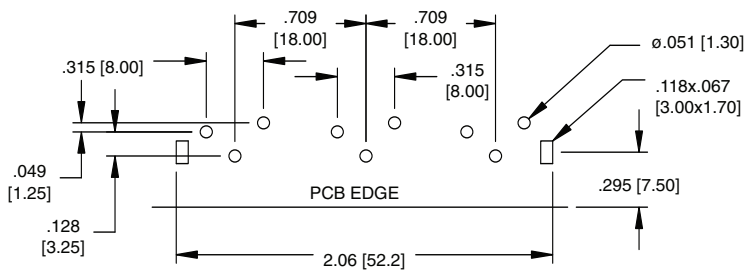

Recommended PCB Layout (Bottom View)