

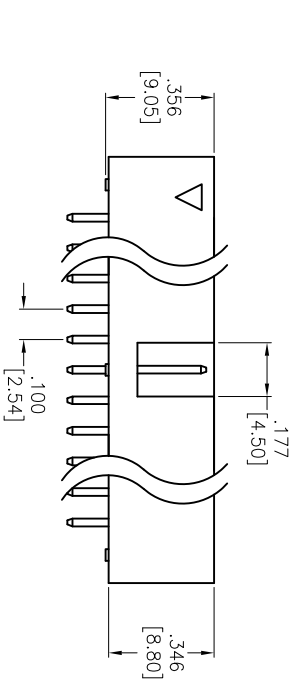
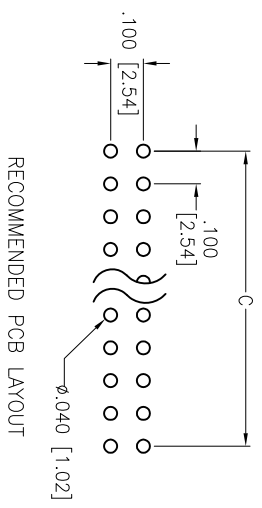


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/16/04	
A		REDRAW AND REVISED	4/07/06	

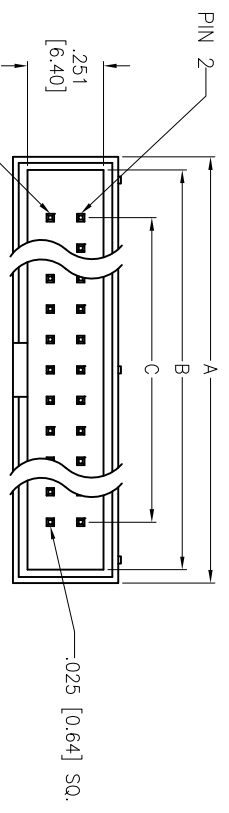

SPECIFICATION:
Material:
 Insulator: PBT, glass reinforced, rated UL-94V-0
 Insulator Color: Black
 Contacts: Brass
Contact Plating:
 Gold Flash over Nickel underplate on contact area,
 Tin over Copper underplate on solder tails
Electrical:
 Operating Voltage: 250V AC max.
 Current rating: 3 Amps max.
 Contact resistance: 20 mohms max
 Insulation resistance: 5000 Mohms min
 Dielectric withstanding voltage: 1000 VAC / minute
Mechanical:
 Mating durability: 500 cycles min.
Temperature Rating:
 Operating temperature: -40°C TO +105°C
 Environmental:
 Lead free, RoHS compliant.

A = .100 [2.54] X No. of Positions / 2 + .300 [7.60]
 B = .100 [2.54] X No. of Positions / 2 + .213 [5.40]
 C = .100 [2.54] X No. of Spaces

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

BOX HEADER, VERTICAL PCB MOUNT,
 2 ROW, .100 PITCH, SELECTIVE GOLD

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES HOLE SIZES
 .X ± .10 ØXX ± .10
 .XX ± .020 ØXXX ± .015
 .XXX ± .015 ØXXXX ± .010

APPROVALS	DATE
DRAWN	SS
CHECKED	
APPROVED	

TITLE		SIZE		PART NO.		REV.	
BOX HEADER, VERTICAL PCB MOUNT, 2 ROW, .100 PITCH, SELECTIVE GOLD		X		BHR-XX-V-SGA		A	
REF: S00039T		SCALE: NTS		SHEET 1 OF 1			

