
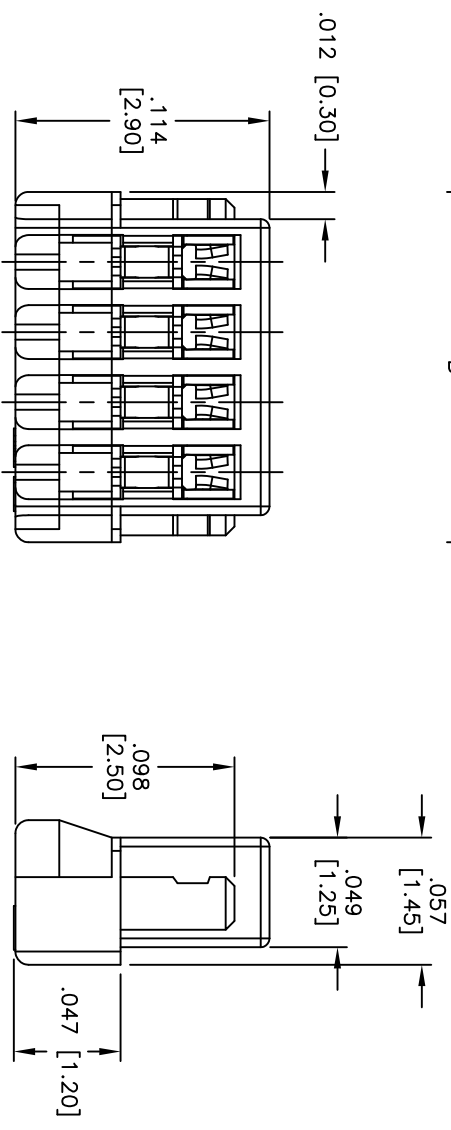


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	3/19/07	
A	11345	REDRAWN	5/09/11	

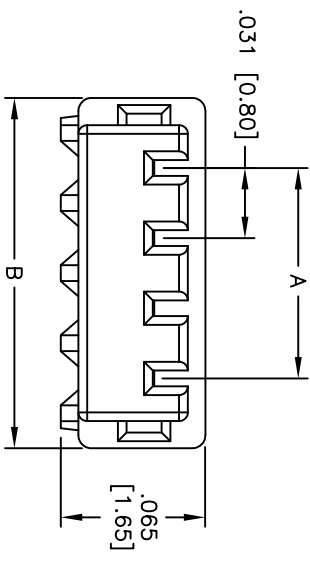

SPECIFICATIONS:

Material: Insulator: Nylon, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze
 Plating: Tin plated over Copper underplate overall
 Electrical: Operating voltage: 250V
 Current rating: 1 A AC/DC
 Contact resistance: 20 mohms max
 Insulation resistance: 1000 Mohms min
 Dielectric withstanding voltage: 200V AC for 1 minute
 Temperature Rating: Operating temperature: -25°C to +85°C
 Environmental: Lead free, RoHS compliant

Positions: 02 thru 20
 A = .031 [0.80] x No. of Spaces
 B = .031 [0.80] x No. of Spaces + .063 [1.60]

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED

INCHES	HOLDS
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010

APPROVALS

DATE
01/17/07

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710
 TITLE: 0.8mm HOUSING IDC TYPE

DRAWN	CHECKED	APPROVED	SIZE	PART NO.	SCALE	SHEET	REV.
BW			X	08CH-A-XX-IDC	NTS	1 OF 1	A

6 5 4 3 2 1

