
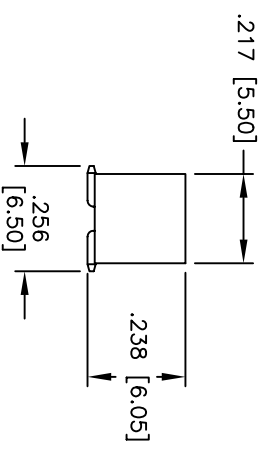
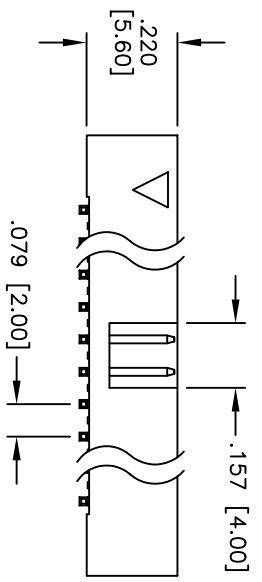
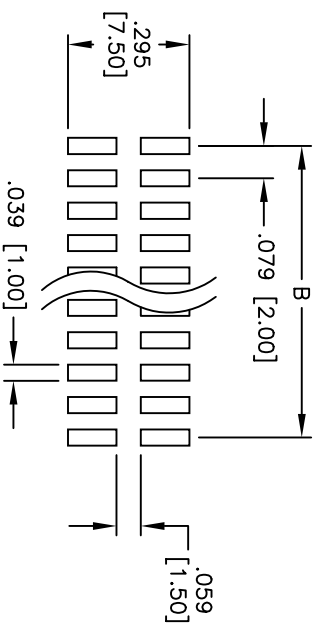


Rev	AWO #	Description	Date	Appr
-		RELEASED	12/29/04	

APPROVED: _____ TITLE: _____
 DATE: _____

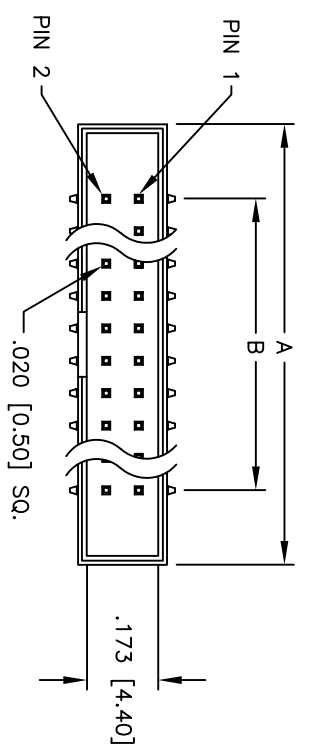

SPECIFICATIONS:

- Material: Insulator: Hi-Temp Nylon, rated UL 94V-0
- Insulator color: Black
- Contacts: Brass
- Plating: Tin over Copper underplate overall
- Electrical: Operating voltage: 250 VAC max.
- Current rating: 1 Amp max.
- Contact resistance: 20 mohms max. initial
- Insulation resistance: 5,000 Mohms min. @ 500 VDC
- Dielectric withstanding voltage: 1,000 VAC for 1 minute
- Temperature Rating: Operating temperature: -40°C to +105°C

Positions: 8, 10, 14, 16, 20, 24, 26, 30, 34, 40, 44, 50, 60, 64
 A = .079 [2.00] x No. of Spaces + .362 [9.20]
 B = .079 [2.00] x No. of Spaces

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES [MM] TOLERANCES: EXCEPT AS NOTED		TITLE	
X ± .10	ØX ± .10	.079 [2.00] BOX HEADER, STRAIGHT, TIN PLATED, SURFACE MOUNT	
.XX ± .020	ØXX ± .015	SIZE	PART NO.
.XXX ± .015	ØXXX ± .010	X	2BHR-XX-VT-SMT
APPROVALS	DATE	SCALE:	NTS
DRAWN SS	12/29/04	SHEET	1 OF 1
CHECKED		REV.	
APPROVED			