
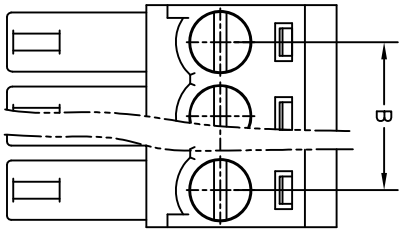
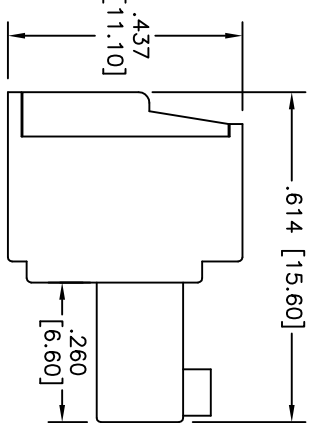

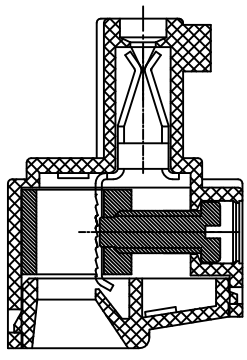


Rev	AWO #	Description	Date	Appr
-	9754	RELEASED	9/18/09	

APPROVED: _____ TITLE: _____

DATE: _____



2 thru 24 Poles Available
 A = .150 [3.81] x No. of Poles + .031 [0.79]
 B = .150 [3.81] x No. of Spaces

SPECIFICATIONS:
 Material: Insulator: Thermoplastic, rated UL 94V-0
 Insulator color: Black
 Wire Guard: Phosphor Bronze, Tin plated
 Terminal Body: Brass, Zinc plated
 Screw: Steel, Zinc plated

Electrical:
 Operation voltage: 300V
 Current rating: 8 Amps
 Insulation resistance: 500 Mohms min @ 500V
 Dielectric withstanding voltage: 2000 VAC for 1 minute
Environmental:
 Lead free, RoHS compliant.
 Operating temperature: -40°C to +105°C



UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED

X	± .10	ØXX	±.10
.XX	± .020	ØXXX	±.015
.XXX	± .015	ØXXXX	±.010

APPROVALS

APPROVALS	DATE

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE
PLUGGABLE BLOCK, PITCH .150 [3.81]
2 THRU 24 POLES

DRAWN	DY	9/18/09
CHECKED		
APPROVED		

SIZE	PART NO.	REV.
X	EBK-XX-B-BK	-
REF: S00020C	SCALE: NTS	SHEET 1 OF 1