

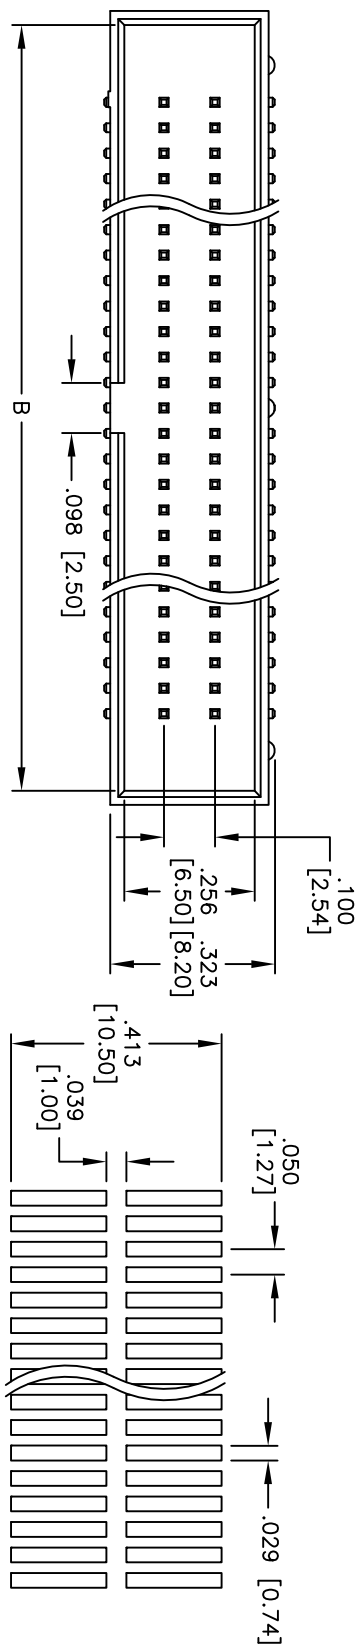


Rev	AWO #	Description	Date	Appr
-		RELEASED	11/22/10	

APPROVED: _____
 DATE: _____ TITLE: _____



RECOMMENDED PCB LAYOUT

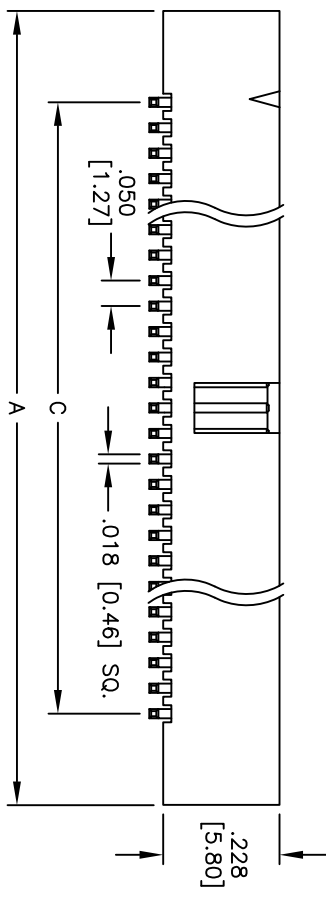

SPECIFICATIONS:
 Material: Insulator: Hi-temp thermoplastic, rated UL 94V-0
 Insulator color: Black
 Contacts: Brass
 Plating: Gold flash over Nickel underplate overall

Electrical:
 Operating voltage: 250 VAC max.
 Current rating: 1 Amp max.
 Contact resistance: 20 mohms max. initial
 Insulation resistance: 5,000 Mohms min.
 Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:
 Operating temperature: -40°C to +105°C
 Environmental: Lead free, RoHS compliant
 Recommended soldering temp: 260°C for 5 seconds



Positions: 08, 10, 20, 26, 30, 34, 40, 44, 50, 60, 68, 80, 100
 A = .050 [1.27] x No. of Spaces + .366 [9.29]
 B = .050 [1.27] x No. of Spaces + .311 [7.89]
 C = .050 [1.27] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED

INCHES	HOLDS	INCHES	HOLDS
X ± .10	ØX ± .10	XXX ± .020	ØXXX ± .015
.XXX ± .015	ØXXX ± .010		

ADAM TECH

909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

DRAWN	CHKD	APPD	DATE	TITLE	SIZE	PART NO.	SCALE	SHEET	REV.
DY			11/22/10	.050" x .100" BOX HEADER VERTICAL MOUNT, SURFACE MOUNT	X	HBHR-A-XX-VG-SMT	NTS	1 OF 1	-