
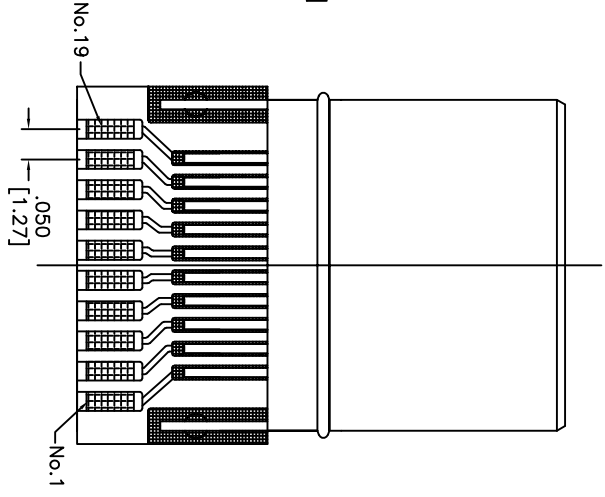
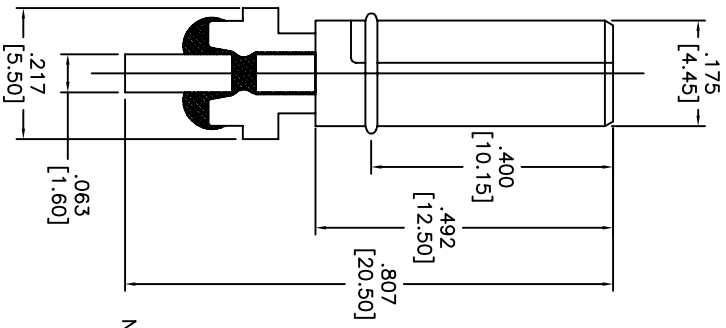
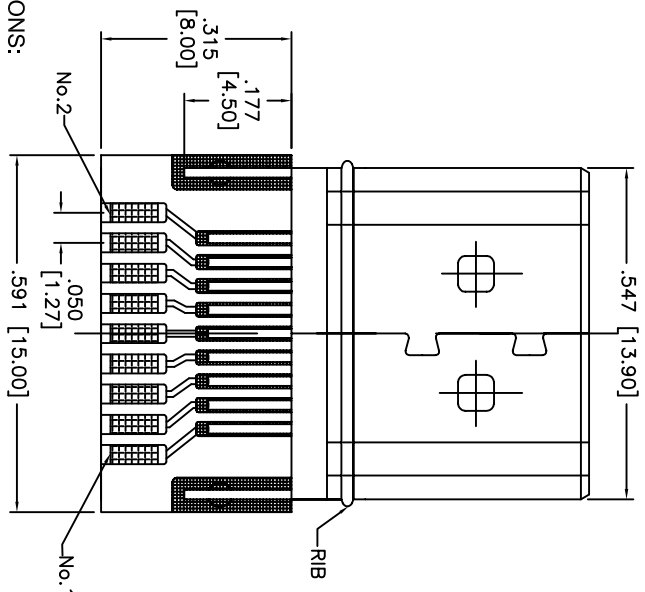


Rev	AWO #	Description	Date	Appr
-		RELEASED	3/15/10	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

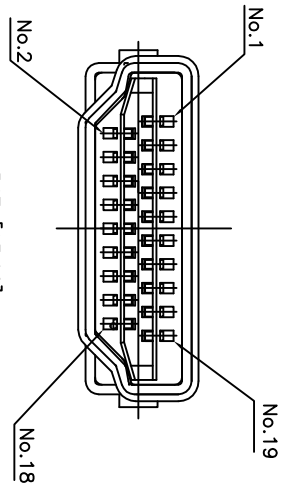

**SPECIFICATIONS:**  
 Material: Insulator: Thermoplastic, UL 94V-0  
 Insulator color: Black  
 Contact: Copper Alloy, Gold over Nickel plated.  
 Shell: Copper Alloy  
 Electrical:  
 Contact current rating: 0.5A MIN.  
 Voltage rating: 40V AC(rms)  
 Withstanding voltage: 500 VAC for 1minute.  
 Insulation resistance: 100 Megaohms Min.  
 Contact resistance: 30 milliohms Max.  
 Operating temperature: -25°C to +85°C  
 Environmental:  
 Lead free, RoHS Compliant  
 Recommended soldering temp: 235°C for 5 seconds.

# ADAM TECH

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: **HDMI MALE CONNECTOR, SOLDER TYPE**  
 OVER MOLDING TYPE

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	HOLDERS
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN	DY
CHECKED	
APPROVED	

SIZE	PART NO.	REV.
X	HDMI-PLUG-OM1	-
REF:	SCALE: NTS	SHEET 1 OF 1

