

Rev	AWO #	Description	Date	Appr
-		RELEASED	6/08/10	

6

5

4






3

2

1

APPROVED: _____

DATE: _____ TITLE: _____

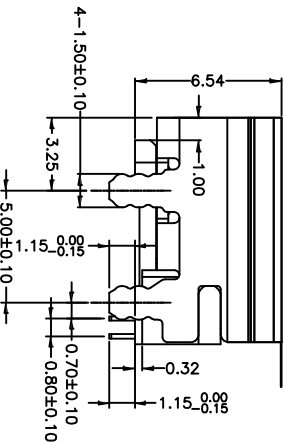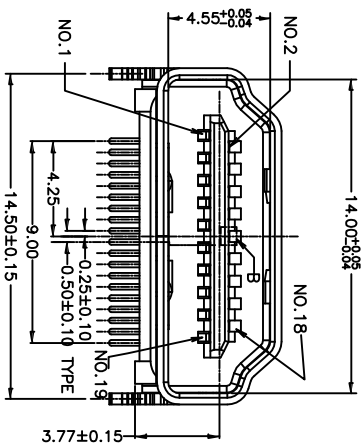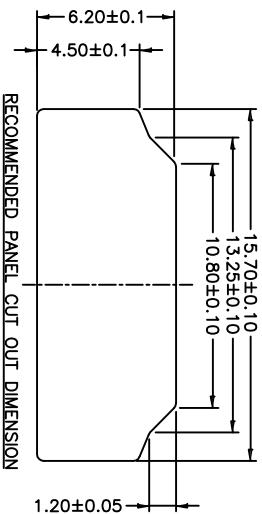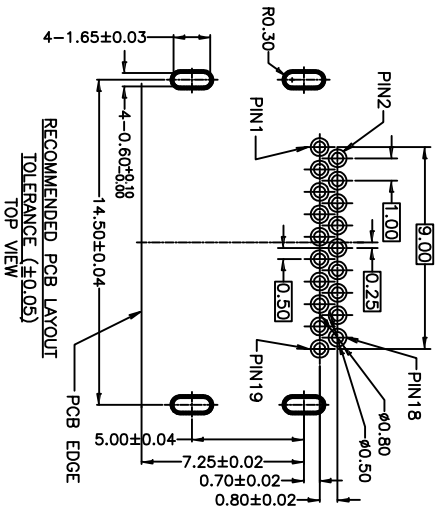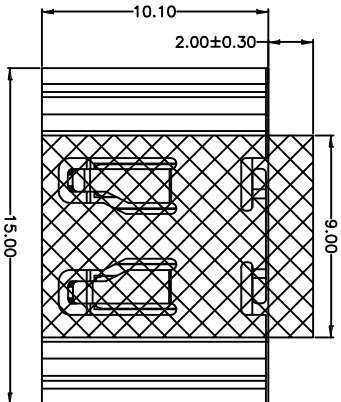

SPECIFICATIONS:

Material: Housing: Hi-temp thermoplastic, UL 94V-0
Housing color: Black
Contact: Copper Alloy
Shield: Copper Alloy, Nickel plated
Plating: 3u" Gold over Nickel underplate on contact area, Tin over Copper underplate on tails.
Electrical: Voltage rating: 40V
Current rating: 0.5A
Dielectric strength: 300VAC for 1 minute min.
Insulation resistance: 100 Megohm min.
Contact resistance: 10 mohms max.
Environmental: Lead free, RoHS Compliant
Recommended soldering temp: 260°C for 5 seconds.

PACKAGED ON TAPE & REEL

A

A

B

B

C

C

D

D

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: HDMI CONNECTOR, RIGHT ANGLE
DIP TYPE, 2 ROWS

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM		INCHES	
TOLERANCES: EXCEPT AS NOTED		HOLE	
.X	± .10	ØX	± .10
.XX	± .020	ØXX	± .015
.XXX	± .015	ØXXX	± .010
APPROVALS		DATE	
DRAWN	DY	6/08/10	
CHECKED			
APPROVED			

SIZE	PART NO.	REV.
X	HDMI-S-RA-1-RF-03-KT-T/R	
REF:	S00015C	SHEET 1 OF 1
SCALE:	NTS	

6

5

4

3

2

1

