

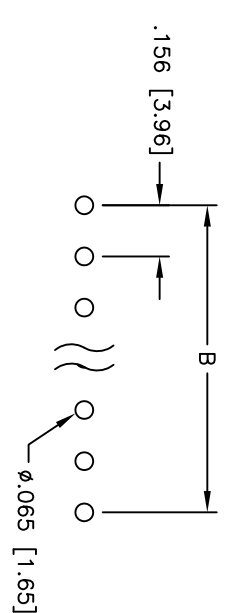
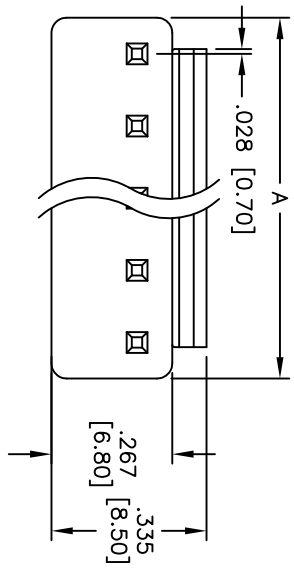


Rev	AWO #	Description	Date	Appr
-		RELEASED	9/20/10	

APPROVED: _____
 DATE: _____ TITLE: _____

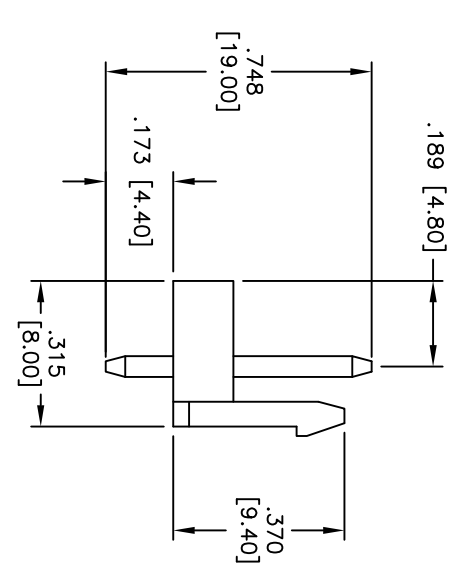

RECOMMENDED PCB LAYOUT

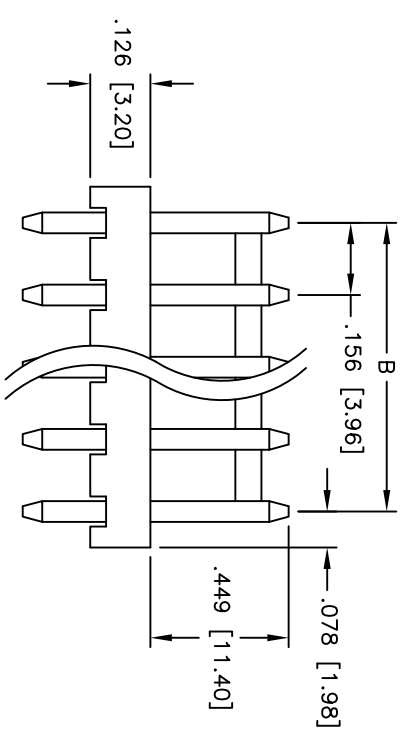

SPECIFICATIONS:

- Material: Nylon 66, rated UL 94V-0
- Insulator color: White
- Contacts: Brass
- Plating: Tin over Nickel underplate overall
- Electrical:
 - Operating voltage: 250 VAC max
 - Current rating: 7 Amps max
 - Contact resistance: Initial value / 10 mohms max
- After environmental testing / 20 mohms max
- Dielectric withstanding voltage: 1,500 VAC for 1 minute
- Temperature Rating: Operating temperature: -25°C to +85°C
- Environmental: Lead free, RoHS compliant
- Recommended soldering temp: 235°C for 5 seconds

Positions: 2 thru 12
 A = .156 [3.96] x No. of Positions
 B = .156 [3.96] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010

APPROVALS

DATE	DATE
9/20/10	9/20/10

ADAM TECH

909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .156 [3.96] POWER HEADER
 STRAIGHT, WITH REAR LOCK

DRAWN	AY	9/20/10	SIZE	PART NO.	LHC-XX-TS-.449/173	REV.
CHECKED	AW	9/20/10	X			-
APPROVED			REF:	S00099T	SCALE: NTS	SHEET 1 OF 1



6 5 4 3 2 1