

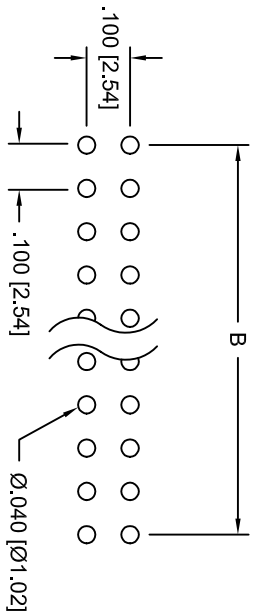
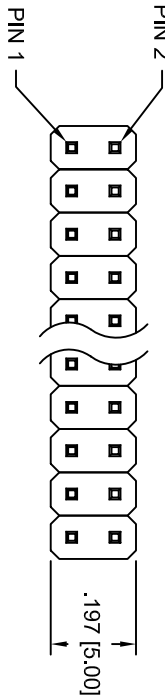


Rev	AWO #	Description	Date	Appr
-		RELEASED	9/20/04	

APPROVED: _____
 DATE: _____ TITLE: _____



RECOMMENDED
PCB LAYOUT

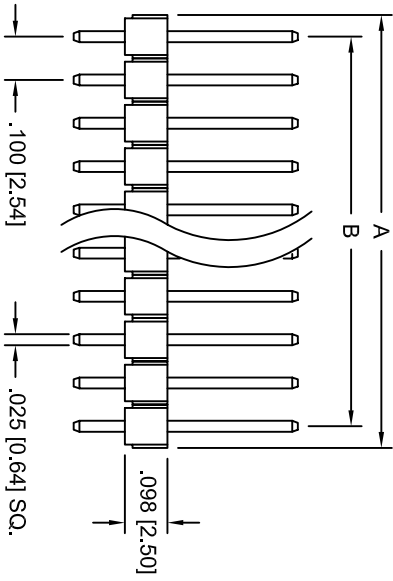

A = .100 [2.54] X No. of Positions.
 B = .100 [2.54] X No. of Spaces.

SPECIFICATIONS:

- Material: Insulator: PBT, rated UL 94V-0
- Insulator color: Black
- Contacts: Brass
- Plating: Gold Flash over Nickel underplate on mating area, Tin over Copper underplate on solder tails
- Electrical: Operating voltage: 250 VAC max
- Current rating: 3 Amps max
- Insulation resistance: 5000 Mohms min @ 500 VDC
- Dielectric withstanding voltage: 1000 VAC for 1 minute
- Temperature Rating: Operating temperature: -55°C to +105°C

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010
APPROVALS	DATE
DRAWN	SS
CHECKED	
APPROVED	

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: DUAL ROW PIN HEADER, .100" [2.54mm]
 PITCH, SEL GOLD PLATED, 2 TO 80 PINS

SIZE	PART NO.	REV.
X	PH2-XX-SGB	-
REF:	SCALE: NTS	SHEET 1 OF 1