Rev	AWO #	Description	Date	Appr
-		Released	12/22/03	

APPROVED: _____

DATE: _____ TITLE: _____

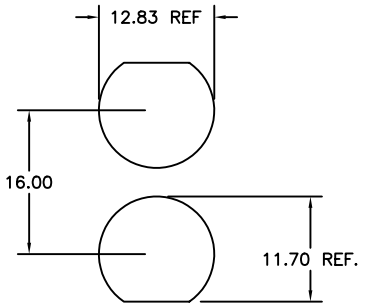

RECOMMENDED
PANEL CUTOUT

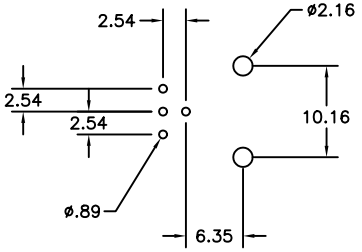

RECOMMENDED
PC Board Layout
Right Angle Mount

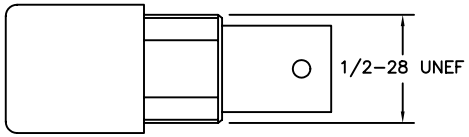

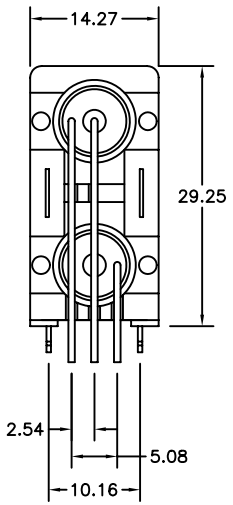

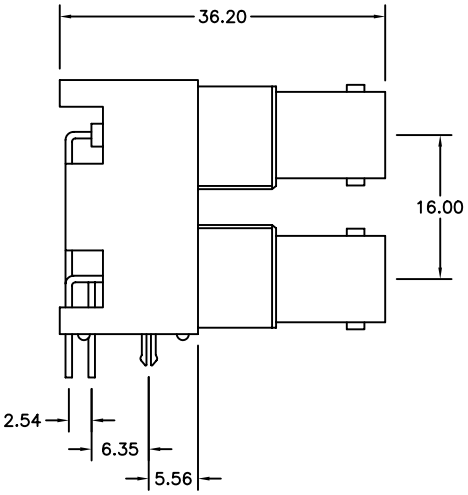



SPECIFICATIONS
Material:
Housing: PBT.
Contacts: Phosphor Bronze, Gold and Tin plated.
Body: Zinc Alloy, Nickel Plated
Grounding Terminal: Copper, Tin plated.
Electrical
Nominal Impedance: 75 Ohms
Frequency Range: 0 – 1 GHz
Maximum Peak Voltage: 500V
Insulation Resistance: 5000 Mohms min @ 500 VDC
Dielectric Withstanding Voltage: 1500 VAC rms.
Temperature Range: –65°C to +165°C

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MM [INCHES]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	SLS	12/22/03
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908–687–5000 Fax: 908–687–5710

TITLE: DUAL PORT BNC, R/A PCB MOUNT, 75 OHM IMPEDANCE

SIZE	PART NO.	REV.
X	RF1-01D-P-00-75	-

REF: | SCALE: NTS | SHEET 1 OF 1