



Rev	AWO #	Description	Date	Appr
-	9986	RELEASED	1/20/10	

APPROVED: _____
 DATE: _____ TITLE: _____

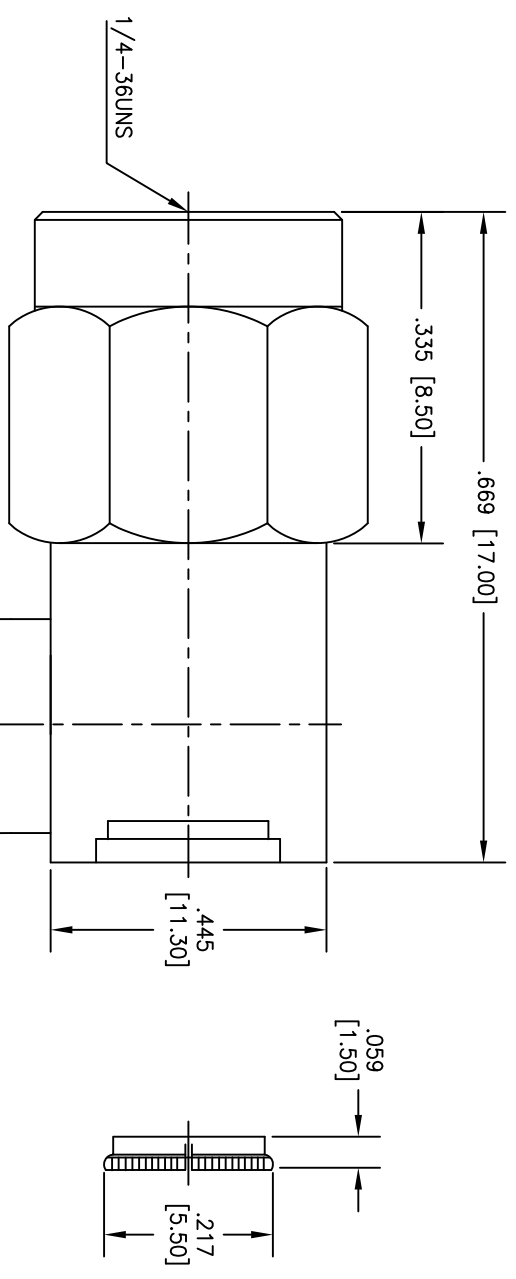

DESCRIPTION	MATERIAL	FINISH
COVER	BRASS	GOLD
HOUSING	BRASS	GOLD
BODY	BRASS	GOLD
WASHER	SK-5	NONE
GASKET	SILICON	NONE
INSULATOR	TEFLON	NONE
PIN	BRASS	GOLD
SHELL	BRASS	GOLD



SPECIFICATIONS:
 Electrical:
 Nominal Impedance: 50 ohms
 Frequency range: 0-12.4 GHz
 Working Voltage: 250 VRMS max.
 Dielectric Withstanding Voltage: 750 VRMS min.
 Contact Resistance: 6 Milliohms max. (Center Contact)
 2 Milliohms max. (Outer Contact)
 Insulator Resistance: 5000 Megohms min.
 Environmental:
 Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES HOLES
 .X ± .10 ØXX ± .10
 .XX ± .020 ØXXX ± .015
 .XXX ± .015 ØXXXX ± .010

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

APPROVALS	DATE
DRAWN DY	1/20/10
CHECKED	
APPROVED	

TITLE	SMA MALE R/A FOR SEMI-RIGID RG402 (.141)
SIZE	PART NO.
X	RF2-01-T-07-50-G
REF:	SCALE: NTS
S0001TT	SHEET 1 OF 1