
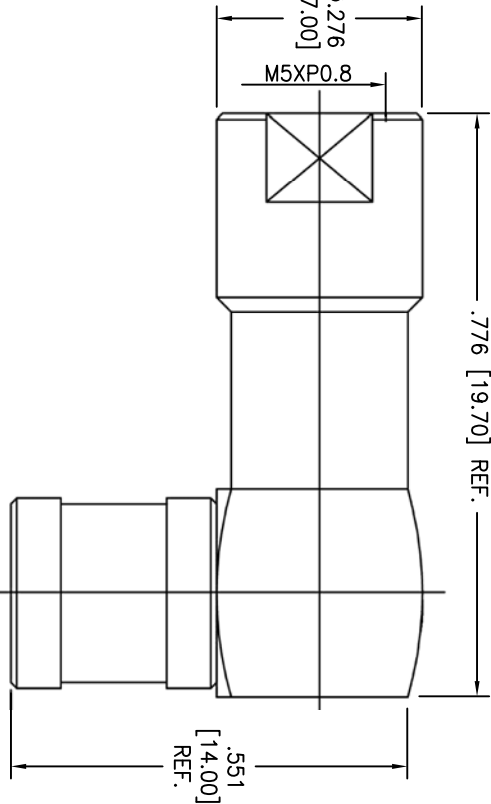
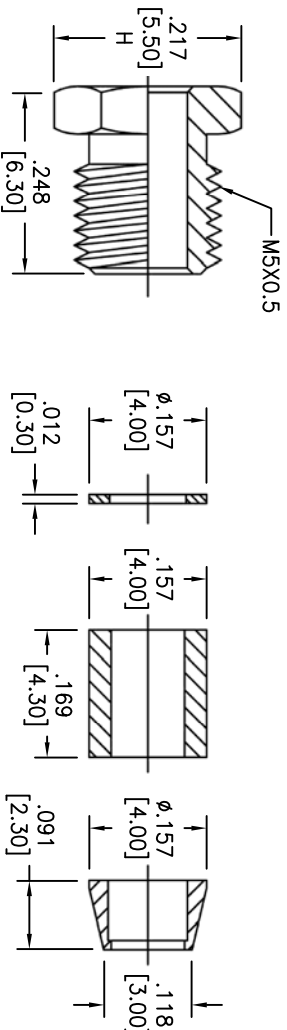


Rev	AWO #	Description	Date	Appr
-	10098	RELEASED	3/12/10	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

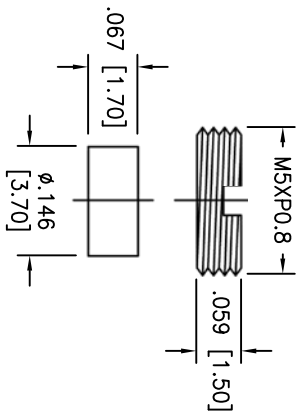

DESCRIPTION	MATERIAL	FINISH
RETAINING RING	BERYLLIUM	GOLD
FERRULE	BRASS	GOLD
UNT	BRASS	GOLD
WASHER	BRASS	GOLD
GASKET	SI-RUBBER	ORANGE
CLAMP	BRASS	GOLD
DIELECTRIC	TEFLON	NONE
PIN	BERYLLIUM	GOLD
BODY	BRASS	GOLD

**SPECIFICATIONS:**

Electrical:  
 Nominal Impedance: 50 ohms  
 Frequency range: 0-4 GHz  
 Working Voltage: 335 VRMS max.  
 Dielectric Withstanding Voltage: 1000 VRMS min.  
 Contact Resistance: 6 Milliohms max. (Center Contact)  
 2.5 Milliohms max. (Outer Contact)  
 Insulator Resistance: 1000 Megohms min.  
 Environmental:  
 Lead free, RoHS compliant.



**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

RIGHT ANGLE SMB MALE CLAMP

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]		TOLERANCES: EXCEPT AS NOTED	
.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XXX	± .015
.XXX	± .015	Ø.XXXX	± .010
APPROVALS		DATE	
DRAWN	DY	3/12/10	
CHECKED			
APPROVED			
SIZE	PART NO.	REV.	
X	RF3-28-T-02-50-G		
REF:	S00049T	SCALE:	NTS
SHEET 1 OF 1			