
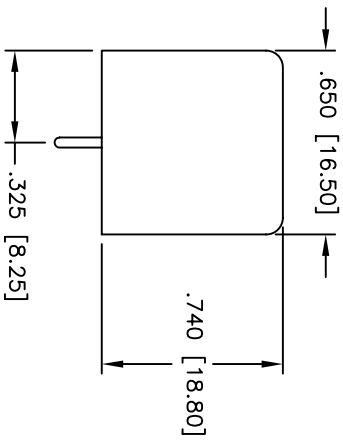
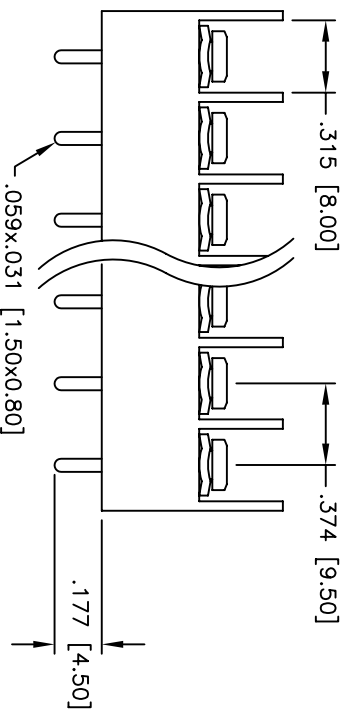


Rev	AWO #	Description	Date	Appr
-		RELEASED	6/8/05	

APPROVED: _____
 DATE: _____ TITLE: _____

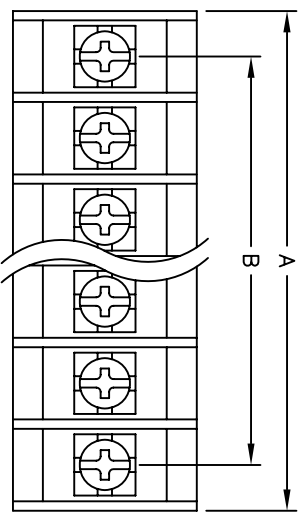

Positions: 2 thru 32
 A = .374 [9.50] x No. of Positions + .079 [2.00]
 B = .374 [9.50] x No. of Spaces

SPECIFICATIONS:

- Material: Insulator: PBT, rated UL 94V-0
Insulator color: Black
- Plating: Contacts: Brass, Tin plated
Screws: Steel, Nickel plated
Hardware: Brass, Tin plated
- Electrical: Operating voltage: 300 VAC max.
Current rating: 15 Amps max.
Contact resistance: 20 mohms max. initial
Insulation resistance: 500 Mohms min.
Dielectric withstanding voltage: 2,000 VAC for 1 minute
- Mechanical: Wire range: 22 - 14 AWG
Temperature Rating: Operating temperature: -65°C to +125°C
- Environmental: Lead free, RoHS compliant
Recommended soldering temp: 235°C for 5 seconds



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN	SS
CHECKED	
APPROVED	

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .374 [9.50] CENTERLINE BARRIER BLOCK
 VERTICAL, PCB TAILS, BARRIER ENDS

SIZE: X
 PART NO.: TBF-XX-01-B
 SCALE: NTS